



# Congestion Management Process

HOUSTON-GALVESTON AREA COUNCIL  
TRANSPORTATION

# TABLE OF CONTENTS

<i>Introduction</i> .....	4
<b>What is Congestion?</b> .....	4
<b>How Does Congestion Impact the Houston-Galveston MPO Region?</b> .....	5
<b>What is a Congestion Management Process?</b> .....	5
<b>Why Create and Continue to Update the CMP?</b> .....	6
<b>History of CMP Success</b> .....	7
<i>Section 1 – Developing Regional Goals and Objectives for Congestion Management</i> .....	7
<i>Section 2 – Defining the Congestion Management Process Network</i> .....	8
<b>Houston - Galveston MPO Region 2021 CMP Network</b> .....	8
<b>How Will We Measure the Levels of Congestion?</b> .....	10
<i>Section 4 – Collect Data and Monitor Performance</i> .....	14
<b>How Will We Collect the Data Needed to Monitor Performance?</b> .....	14
<b>Monitoring Performance</b> .....	15
<i>Section 5 – Identifying Problems and Needs</i> .....	16
<b>How Will We Identify Systemwide Needs and Problems?</b> .....	16
<b>How Will We Identify Local Needs and Problems for Corridors or Segments?</b> .....	18
<i>Section 6 – Congestion Management Strategies</i> .....	26
<b>What Congestion Management Strategies Should be Used?</b> .....	26
<b>Travel Demand Management</b> .....	26
<b>Land Use</b> .....	27
<b>Public Transportation</b> .....	28
<b>Intelligent Transportation System and Operations</b> .....	29
<b>Bicycle and Pedestrian</b> .....	29
<b>Roadway/Mobility (Non-ITS)</b> .....	30

<b>Roadway Capacity Expansion .....</b>	<b>31</b>
<b>Freight Mobility .....</b>	<b>31</b>
<b>How Should These Strategies be Evaluated?.....</b>	<b>32</b>
<i>Section 7 – Implementation Strategies .....</i>	<i>35</i>
<b>How Should the CMP be Integrated with Regional Planning and Programming Documents? .....</b>	<b>35</b>
<b>Regional Transportation Plan (RTP).....</b>	<b>35</b>
<b>Transportation Improvement Program (TIP) .....</b>	<b>36</b>
<b>Project Development/NEPA Process.....</b>	<b>37</b>
<b>Regional Intelligent Transportation Systems (ITS) Architecture .....</b>	<b>37</b>
<b>How Will Projects be Analyzed for Congestion Management Using the CMP? .....</b>	<b>38</b>
<b>CMP Analysis for Major Investments .....</b>	<b>43</b>
<b>CMP Analysis for Other Investments.....</b>	<b>44</b>
<b>CMP Analysis for Accelerated Projects.....</b>	<b>46</b>
<b>CMP Analysis Exemptions.....</b>	<b>47</b>
<b>Quantitative Analysis .....</b>	<b>49</b>
<i>Section 8 – CMP Strategy Effectiveness .....</i>	<i>50</i>
<b>The Unknown.....</b>	<b>50</b>
<b>Next Steps.....</b>	<b>50</b>
<i>Appendix A – Additional Networks for Monitoring and Mitigation .....</i>	<i>51</i>
<b>Congestion Strategy Networks – Tow and Go, Bikeways, Sidewalks, High-Capacity Transit, Intelligent Transportation Systems .....</b>	<b>51</b>
<b>Figure A-2: Regional ITS Network .....</b>	<b>52</b>
<b>Figure A-3: Fixed Guideway Transit Including Bus Rapid Transit.....</b>	<b>53</b>
<b>Figure A-4: Regional Park and Ride Map .....</b>	<b>54</b>
<b>Figure A-5 Texas Regional Freight Corridor .....</b>	<b>55</b>

**Figure A-6 Regional Bikeways Map..... 56**

**Figure A-7: Regional Pedestrian Sidewalk Map..... 57**

*Appendix B – Congestion Management Process Project Analysis Form ..... 58*

*Appendix C – The 36 Most Congested Corridors in the Houston- Galveston MPO Region..... 65*

# INTRODUCTION

## What is Congestion?

The Federal Highway Administration defines congestion as: “The level at which the transportation system performance is no longer acceptable due to traffic interference. The level of acceptable system performance may vary by type of transportation facility, geographic location, and/or time of the day.” In other words, congestion is when the transportation network is no longer functioning efficiently due to traffic.

There are two types of congestion: recurring congestion and non-recurring congestion.

Conditions that can lead to recurring congestion include:

- Bottlenecks – These are sections on a road where there is a change in traffic capacity leading to congestion at that section and upstream of it. An example of a bottleneck is a section of roadway where two lanes are reduced to one lane.
- Excess Demand – This refers to a condition on a roadway where more vehicles are on the road than the capacity of the road.
- Same Locations – Congestion that frequently occurs along the same segment of roadway for various reasons, such as poor access management.
- Commuters – This refers to people who travel from home to work and vice versa, likely during the same time of the day, resulting in morning and evening rush hours.
- Seasonal and Long-Term Construction – Increased traffic congestion that occurs at the same time each year or major construction on the right of way of travel that results in one or more lane closures or in significant speed reduction. Either of these conditions results in a recurring congestion.

Conditions that can lead to non-recurring congestion include:

- Accidents – Incidents involving a collision between at least one vehicle and another vehicle, another road user, or a stationary roadside object, which may result in death, injury, or property damage. Accidents can severely affect traffic flow.
- Disabled Vehicles – Mechanically disabled vehicles blocking one or more travel lanes on a road or on the roadway shoulder affecting the flow of traffic.
- Weather – Atmospheric conditions that impact normal driving speeds on a roadway.
- Varying Locations – Congestion that normally does not happen at the same location consistently.
- Short-Term Construction/Maintenance – These refer to minor construction or maintenance work on a roadway that might lead to disrupted traffic for short time periods.

## How Does Congestion Impact the Houston-Galveston MPO Region?

Congestion has plagued the eight-county Houston-Galveston Metropolitan Planning Organization (MPO) region for decades and is indicative of a larger national problem. Congestion can also negatively impact safety, quality of life and health. For our region to grow sustainably and remain economically competitive, the implementation and continual monitoring of congestion management strategies is critical. Despite the changes resulting from the COVID-19 pandemic, efforts to expand multimodal transportation will remain essential to our growing region.

The dynamics of congestion management have changed substantially because of the impact of the COVID-19 pandemic on the Houston -Galveston MPO region. During the pandemic, travel patterns have changed dramatically.

Commuter travel has declined especially during the a.m. peak as telework has replaced in-person work for office employees. Related to this reduction in travel and concerns related to social distancing, there have also been sharp modal declines in transit, vanpooling, and carpooling. Declines in commuter traffic have been greatest in the Houston Central Business District. The Central Business District showed a 59% decline in traffic according to INRIX travel modeling data from the Texas Transportation Institute for trips between December 2020 and December 2019. Traffic and work patterns are slowly returning to pre-COVID levels, but it is uncertain whether there have been permanent shifts in travel behavior.

## What is a Congestion Management Process?

The purpose of a congestion management process (CMP) is to reduce congestion by implementing best practices that have been shown to improve the performance of a transportation system. A CMP is an eight-part process that weaves congestion management into transportation planning. It is essentially a roadmap that guides the region towards reducing congestion as it plans and implements transportation projects.

The eight parts of the CMP are:

Develop Regional Objectives – Select objectives that will have the greatest impact on mitigating congestion.

Define the CMP Network – Identify what are the boundaries of the roadway congestion area.

Develop Multimodal Performance Measures – Identify what measures are most important in assessing congestion.

Create a Performance Monitoring Plan – Determine data we will collect to monitor system performance, as well as the source of the data.

Analyze Congestion Problems and Needs – Identify problem areas for congestion in the region.


Identify and Assess Strategy – Develop strategies that will mitigate congestion based on the problems identified. Since modal shift is key, a robust multimodal component to congestion mitigation is essential.

Program and Implement Strategies – Implement the CMP in coordination with the RTP and TIP to provide parameter and constraints on project proposals and move forward those roadway and multimodal projects that do not negatively impact and may improve congestion in the future.

Determine Strategy Effectiveness – Evaluations should occur annually to determine if strategies and performance are working. Changes to performances and/or strategies should be considered if performance falls significantly below

expectations.

The figure below shows how each element of the CMP works together.

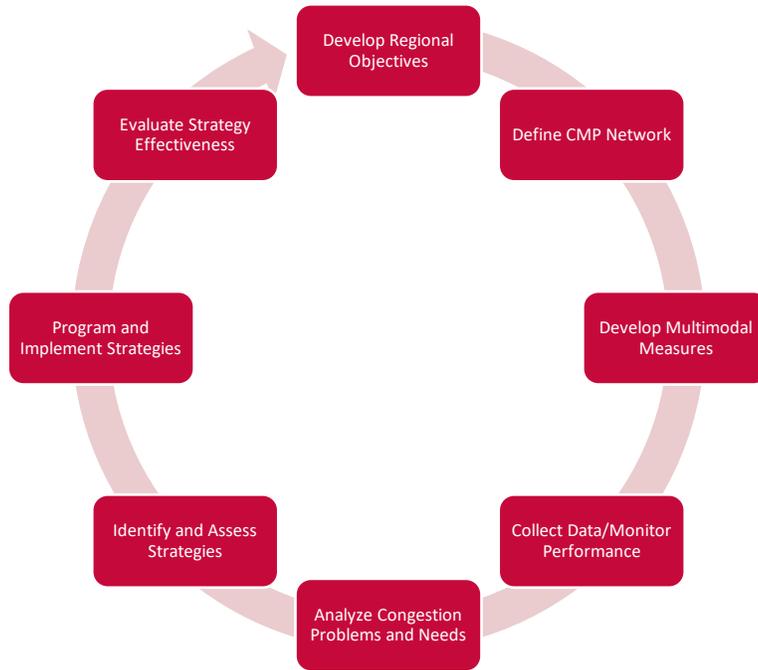

## Why Create and Continue to Update the CMP?

The CMP is a structured continuous process for analyzing regional congestion issues. It is also federally mandated for MPOs.

The Houston-Galveston Area Council (H-GAC) is the MPO responsible for the development and implementation of the CMP in the Houston-Galveston Transportation Management Area. The Transportation Management Area consists of Brazoria, Chambers, Fort Bend, Galveston, Harris, Liberty, Montgomery, and Waller counties. H-GAC is also a voluntary association of 131 local governments and elected officials in the 13-county Gulf Coast planning region of Texas. Its service area is 12,500 square miles and contains more than 7 million people.

The CMP informs and feeds into the Regional Transportation Plan (RTP), our region's long-range transportation plan, and the Transportation Improvement Program (TIP), our fiscally constrained financial plan. The process, if executed, allows for informed decision-making and assists with greater stewardship of public funds by helping H-GAC analyze projects with an eye towards congestion reduction.

The purpose for this CMP update is to provide a clear document that captures the way we currently manage and analyze congestion in our region. This update will be replaced within one to two years with another that will incorporate the most recent changes to the RTP, new performance measures set for safety, and the work of a new taskforce that will be established to look at

opportunities to integrate tools, such as COMPAT by the Texas Transportation Institute of Texas A&M and TOPS-BC by the Federal Highway Administration.

## History of CMP Success

Past strategies outlined in the CMP have proven successful in the region. One example is Gulf Coast Regional Tow and Go™ Program. The Tow and Go program rapidly removes roadway vehicles that are disabled or involved in collision-mitigating roadway congestion in the MPO region.

According to the 2019 H-GAC Annual Mobility Report, traffic incidents that did not involve heavy trucks were cleared 5% faster in 2019 versus 2018 (30.1 minutes compared to 31.8 minutes). While this represents only 1.7 minutes per traffic occurrence, multiplied by many thousands of individual incidents, the impact on reducing unplanned congestion is significant. Expansion of service in 2020 to all of unincorporated Harris County as well as the cities of Bellaire, Jersey Village, La Porte, and Humble, Texas, will extend the scope and amount of congestion relief realized by this incident management program.

## SECTION 1 – DEVELOPING REGIONAL GOALS AND OBJECTIVES FOR CONGESTION MANAGEMENT

This update to the CMP has three goals for the region. These relate to objectives from the 2045 Regional Transportation Plan. They are to:

- Move people and goods efficiently
- Strengthen regional economic competitiveness
- Preserve and protect natural and cultural resources

Congestion in our region creates real impacts to our economy. Competing in a global economy requires the Houston-Galveston region to have a well-functioning transportation system (especially for movement of freight) that is not slowed by severe roadway or other transportation congestion. The ability for people and goods to move through our region with less delay will help improve quality of life and the ability to attract new businesses. It will also result in improved air quality.

Our objectives related to the goals mentioned above are to:

- Increase reliability of travel
- Increase truck time reliability
- Increase share of non-single occupancy vehicle (SOV) trips
- Move toward meeting federal air standards

Increased reliability refers to our ability to travel in “free-flow” conditions. Free flow conditions refer to times where road travel operates at the designed speed and does not slow because of volume of vehicles or crash incidents and/or accidents.

As our region is expected to grow exponentially, targets to maintain truck time reliability will require significant work, as will our work to make people movement more efficient. Both will ensure the Houston-Galveston MPO region improves its standing as compared to other regions to support job growth, improve quality of life, and economic competitiveness.

Reducing single occupancy vehicle use ensures that we are using our transportation network more efficiently. This requires seeing capacity through a new lens, focusing on increasing the number of people we can move through our network without increasing the number of vehicles. Doing so saves the region money, improves congestion, and improves air quality.

## SECTION 2 – DEFINING THE CONGESTION MANAGEMENT PROCESS NETWORK


The goals and objectives outlined in Section 1 will be applied to a defined physical network (specific boundaries applied to highways, roadways, etc.) that we will monitor and measure for congestion mitigation and management. This is called the CMP network.

The network for this CMP is identical to the region’s conformity network and will consist of the freeways, highways, tollways, HOV lanes, HOT lanes, and principal arterials, within the MPO region, that form the National Highway System. Together, these roadways provide robust sources for monitoring congestion data at a regional level for federal performance measures. Additionally, we included sections of FM 1488 and SH 146 as shown in blue in the map below. These additional roadways are essential for more robust regional congestion analysis and monitoring.

### 2.1 CMP Roadway Classifications

Category	Description	Comments
Freeways / Highways	<ul style="list-style-type: none"> <li>All access-controlled facilities, including (but not limited to) interstates and U.S. highways</li> </ul>	<ul style="list-style-type: none"> <li>Toll facilities within these corridors will be captured as an attribute in the facility description</li> </ul>
Tollways, HOV, and HOT Lanes	<ul style="list-style-type: none"> <li>All toll facilities, high occupancy lanes, and HOT toll lanes within the regional National Highway System</li> </ul>	<ul style="list-style-type: none"> <li>Toll facilities within the corridor of a non-toll facility will be referenced within a separate category</li> </ul>
Principal Arterials	<ul style="list-style-type: none"> <li>Principal arterials as classified by the H-GAC Travel Demand Model Summary Road Type Equivalency</li> </ul>	Includes H-GAC facility types: <ul style="list-style-type: none"> <li>09 – principal arterial with some grade separations</li> <li>10 – principal arterial – divided</li> <li>11 – principal arterial – undivided</li> <li>19 – saturated arterial</li> </ul>
Selected Minor Arterials	<ul style="list-style-type: none"> <li>FM1488 and SH146</li> </ul>	

## Houston - Galveston MPO Region 2021 CMP Network

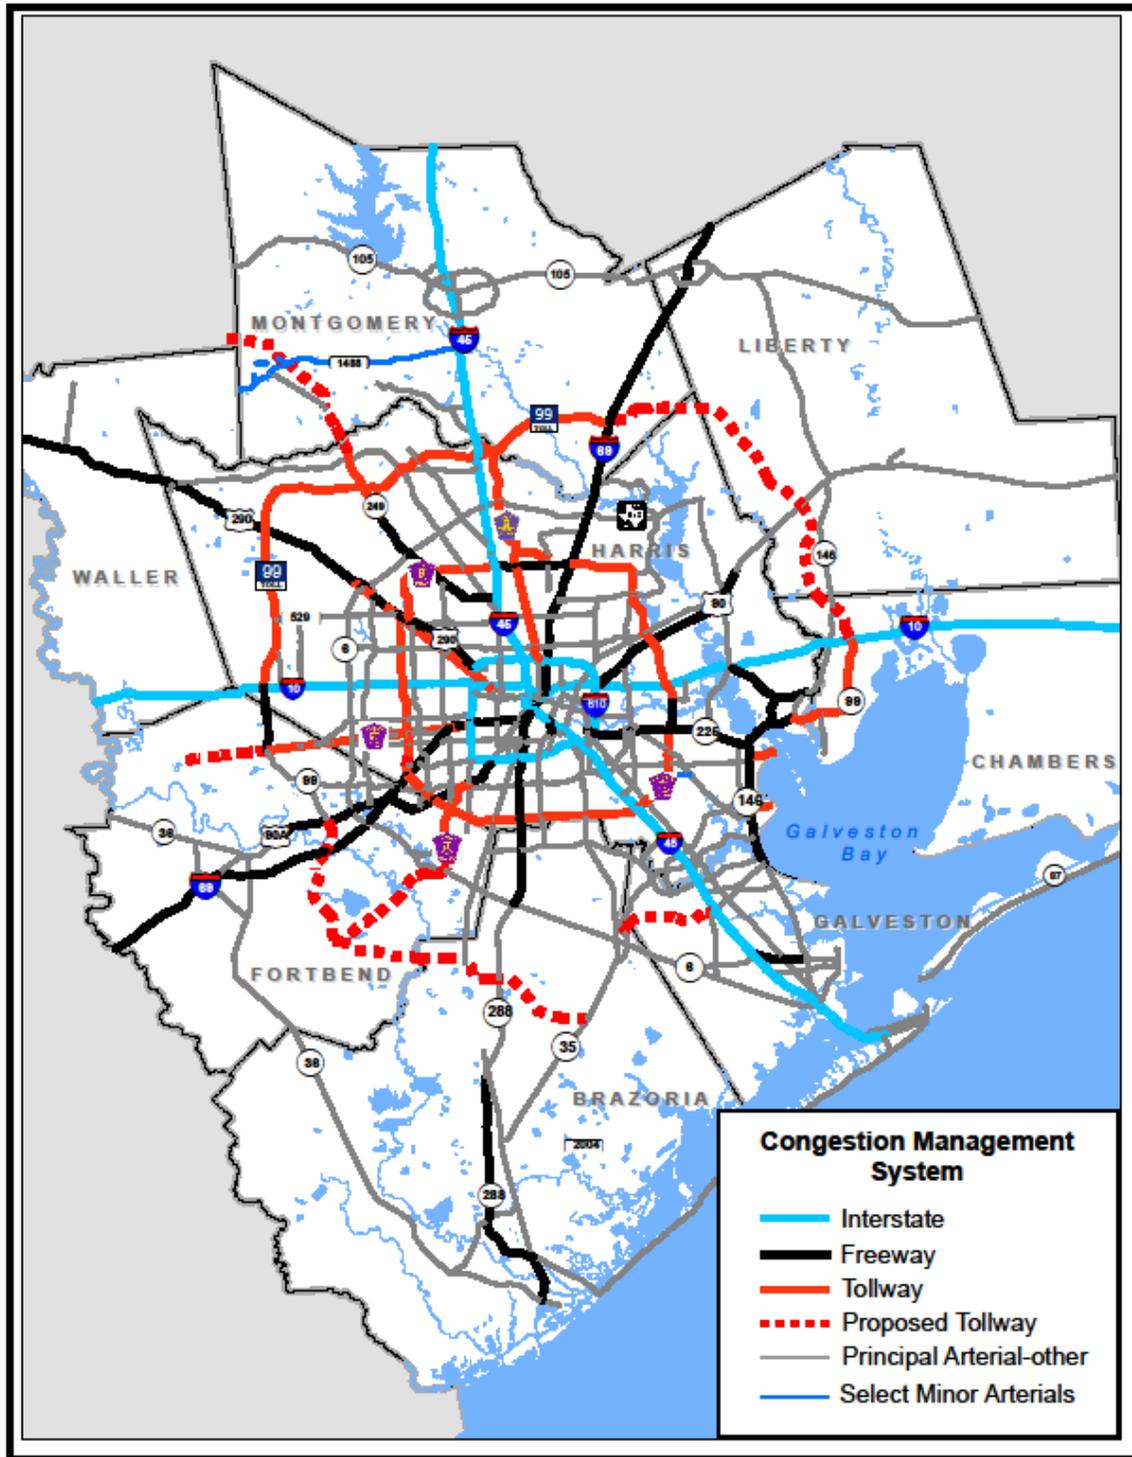

## SECTION 3 – DEVELOP MULTIMODAL PERFORMANCE MEASURES

### How Will We Measure the Levels of Congestion?

Performance measures provide clear indicators of progress achieved towards CMP objectives. They can also indicate points of weakness in achieving progress.

Since congestion is a large umbrella, it is not realistic nor efficient to look at every component or element that worsens conditions. Performance measures must target substantive key areas that, if addressed, will make the most meaningful impact to reducing congestion.

In this CMP, we outline systemwide and localized performance measures that will be applied to the CMP network. The systemwide performance measures are required for collection in the region for the National Highway System. They gauge how we are doing in managing congestion on a systemwide basis.

Federal rulemaking requires H-GAC, as the MPO for the region, to measure existing conditions, set performance targets, and measure performance over time. The System Performance Group is a set of performance measures that place focus on personal travel, as well as freight, reducing congestion and tailpipe emissions, and increasing multi-occupant vehicle use. H-GAC gathers data of existing conditions, formulates a quantitative forecast, and sets targets for improving the performance of the transportation system, thereby reducing congestion, and over time, monitoring the conditions and reporting progress. Performance targets were set with input from the public and in collaboration with the Regional Transportation Plan Subcommittee and the Transportation Advisory Committee, who made recommendations for the targets to the Transportation Policy Council, who is responsible for approving the regional congestion and air quality performance targets. Setting the performance targets flat over time indicates progress given the expected growth of the region's population. Improving the system performance of the transportation network means there will be more reliable and less congested roadways, resulting in better air quality for the region. For detailed technical information, the 2018 Performance Measures System Evaluation Report can be viewed at <http://2045rtp.com/documents/plan/Appendix-P-Performance-Measures-System-Evaluation.pdf>, and the 2020 Performance Measures Report at <https://www.h-gac.com/getmedia/c27f3ae7-4dfc-4ff2-ab70-e65a3ba5abc2/performance-measures-report.pdf>.

Localized performance measures (by corridor, segment) on the other hand, allow for better analysis of congestion and its causes in the region. The localized and systemwide measures are listed in Figure 3-1.

**Figure 3-1: CMP Performance Measures**

CMP Objective	Systemwide Measure	Local Measures
Increase reliability	Percentage person-miles traveled on Interstate that are reliable/Level of Travel Time Reliability (LOTTR)	Annual person-hours of delay per mile
	Percentage person-miles that traveled on non-interstate NHS that are reliable / LOTTR	Texas congestion index
	Peak hour excessive delay	N/A
Increase truck travel time and reliability	Truck travel time reliability index on the interstate	Texas truck congestion index Truck delay per mile
Increase number of non-single occupancy vehicle (SOV) trips	Percentage of commuting trips	Commute to work rate driving alone - census tract level
Move towards meeting federal air standards	Reduce NOx emissions	N/A

**Definitions for Systemwide and Local Measures**

*Percentage of miles that are traveled on interstate that are reliable/LOTTR*

*Percentage of miles that are traveled on non-interstate that are reliable/LOTTR*

Level of time travel reliability (LOTTR) refers to what is known as the ability to travel in “free flow” conditions. Free flow conditions are defined as the ability to travel on the interstate unfettered by substantial congestion. This is the same measure for non-interstates and tollways. The source for the information is the Texas Transportation Institute (TTI) of Texas A&M. Information is only provided by TTI at the aggregate level and is not available at the segment or sub-aggregate level.

*Peak hour excessive delay*

TTI ranks the annual hours of delay per driver in the Houston-Galveston MPO region.

*Truck travel time reliability index*

Measures the time it takes trucks to travel area interstates during morning and peak hours. A measure of 2.2 means that it took 2.2 times as long as it would take at average expected speeds without congestion to travel the same segment of road. It is less reliable since it is a longer time than would be expected. Information is only provided by TTI at the aggregate level and is not available at the segment or sub-aggregate level.

### *Increasing the number of non-single occupancy vehicles (non-SOVs)*

Percentage of commuting trips taken place using other travel modes besides driving alone. Non-SOV trips include carpools, vanpools, transit, bicycling, and walking. The 2022 target is lower due to the impact of the COVID-19 pandemic and expected short term negative impacts to transit and vanpooling usage. The U.S. Census American Community Survey (ACS) is the source of the data.

### *Annual person-hours of delay per mile*

TTI ranks the most congested roadways in the state by measuring the total annual hours of extra travel time experienced by each roadway user during all times of day and dividing that total by the roadway length. This measure accounts for actual travel speed, free flow travel speed, roadway volume, and vehicle occupancy relative to the length of the roadway.

### *Annual truck delay per mile*

Like the total annual hours of delay for all users per mile discussed above, TTI has calculated the total annual hours of extra travel time experienced by trucks during all times of day and divided that total by the roadway length. This measure accounts for actual travel speed, free flow travel speed, and truck volume relative to the length of the roadway.

### *Texas congestion index*

This congestion index is calculated by TTI to compare the peak-period average travel time and the free flow travel time. The score is arrived at by dividing the congested (peak hour) travel time by the free flow travel time. A score of 1.0 would mean that the average travel time during peak hours is identical to free flow conditions and therefore not a congestion concern. However, a score of 2.0 would mean that it would take, on average, twice the time during peak hours to travel the same segment during free flow conditions. This calculation does not account for traffic volumes or vehicle occupancy.

### *Texas congestion index (trucks only)*

As discussed above, this index is calculated by TTI to compare the peak-period average travel time for truck traffic and their free flow travel time. A score of 1.0 would mean that the average travel time during peak hours for trucks is identical only to free flow conditions and therefore not a congestion concern. However, a score of 2.0 would mean that it would take, on average, twice the time during peak hours for trucks to travel the same segment during free flow conditions. This calculation does not account for truck volumes.

### *Commute to work rate driving alone*

The American Community Survey conducted by the U.S. Census Bureau captures the numbers of respondents who work and how they get to work. This allows them to compute a drive alone rate that impacts the level of congestion in the region.

### *Reduce NOx emissions*

H-GAC's eight-county MPO area does not meet federal standards for ozone attainment and must continue to work towards meeting those standards. Ozone is a secondary pollutant that forms in the atmosphere via a chemical reaction that combines nitrogen oxides (NOx) in the presence of sunlight. Most NOx emissions in our region are generated by on-road and non-road mobile sources.



## SECTION 4 – COLLECT DATA AND MONITOR PERFORMANCE

H-GAC has developed a strategy for acquiring, analyzing, and monitoring data associated with the performance measures identified in Section 3. Several sources of data are used to compile the information, which will be used on an ongoing basis to monitor performance. In the figures below, we outline the source of data for each performance measure.

### How Will We Collect the Data Needed to Monitor Performance?

**Figure 4-1: CMP Performance Measures with Data Sources**

CMP Objective	Systemwide Measure	Data Source(s)	Local Measure	Data Source(s)
Increase reliability	Percentage person miles that traveled on Interstate that are reliable/ LOTTR	Texas Transportation Institute	Annual person-hours of delay per mile Texas truck congestion index	Texas Transportation Institute
	Percentage person miles that traveled on non-interstate NHS that are reliable/LOTTR	Texas Transportation Institute	Texas congestion index	Texas Transportation Institute
	Peak Hour Excessive Delay	Texas Transportation Institute	N/A	Texas Transportation Institute
Increase truck travel time and reliability	Truck travel time reliability index on the interstate	Texas Transportation Institute	Truck delay per mile	Texas Transportation Institute
Increase number of non-single occupancy vehicle (SOV) trips	Mode share	American Community Survey (Census estimate)	Commute to work rate driving alone-Census tract level	American Community Survey
Move towards meeting federal air quality standards	NOx emissions	Texas Commission on Environmental Quality	N/A	N/A

H-GAC will need to integrate data from these multiple sources into a single database. Integration of data types into a single location would allow ease in access and data analysis. Data should be

inspected for outliers and other flaws. If data is incomplete or missing, it should be corrected or disregarded.

## Monitoring Performance

Evaluation of system performance and effectiveness should occur annually during the second half of the year to allow for the most recent year's data to be used in congestion management process analysis. This practice will keep the data current and consistent from year to year. Once per year, data should be shared in the H-GAC Annual Mobility Report.

Data analysis should be consistent among separate datasets. If a performance measure is being calculated for historical data, the timeline of analysis should be consistent between data types. Primary types of data shall be consistent with the RTP/CMP goals, objectives, and performance measures.

## SECTION 5 – IDENTIFYING PROBLEMS AND NEEDS

Congestion along the congestion management process network is evaluated both systemwide and along network segments using available data to identify and prioritize problem areas. To evaluate whether the network is succeeding in achieving the goal of improving the movement of people and goods, the region also uses measure of travel time reliability, hours of peak hour excessive delay, and the response time to incidents/crashes along the network.

### How Will We Identify Systemwide Needs and Problems?

Targets aligned with the federally required performance measures have been set for the CMP network to measure systemwide performance on the National Highway System. Some targets may appear “flat” when compared to 2020 actual performance. Flat performance, in these cases, would still indicate progress towards the target due to expected growth in the region’s population.

Below are the targets set for systemwide congestion management as well as our current performance related to these metrics.

**Figure 5-1: CMP Network Systemwide Measures**

Objectives	Performance Measures	2018 Baseline	2020 Actual	2022 Target
Increase reliability	Percentage person miles that traveled on interstate that are reliable/LOTTR	63%	69%	69%
Increase reliability	Percentage person miles that traveled on non-interstate NHS that are reliable/LOTTR	73%	80%	80%
Increase reliability	Peak hour excessive delay (annual hours/person)	14	14	14
Increase truck travel time and reliability	Truck travel time reliability index on the interstate	2.1	2.2	2.2
Increase number of non-single occupancy vehicle (SOV) trips	Percentage of trips	20.1%	21.1%	20%
Moving toward meeting federal air standards	Emission reductions of NOx (kg/day)	453.74	158.32	1,429.08 <sup>1</sup>

<sup>1</sup> In Figure 5-1, there is a noticeable difference between the 2020 Actual and the 2022 Target for the Emission reductions of NOx. This is a result of revising the methodology at the mid performance period. In 2020, H-GAC revised the methodology from a direct accounting of CMAQ-funded projects programmed in the TIP, to a methodology of calculating a historical average of CMAQ projects over four years.

## Targets Explained

*Level of travel time reliability*

*Percentage person miles that traveled on interstate that are reliable/LOTTR*

*Percentage person miles that traveled on non-interstate NHS that are reliable/LOTTR*

Travel time reliability is when the travel time along a roadway remains consistent during peak periods compared to free flow conditions. The level of travel time reliability (LOTTR) is a measure comparing long travel time to typical travel time. The closer those travel times are, the more reliable the travel times are for a roadway. The percentage of network mileage that is reliable means that travel times for those portions of the network are always consistent.

Based on a comparison of the LOTTR in 2018 and 2019 for the regional network, the mileage of reliable interstate roadways increased by 7% from 64.4% to 69%. The mileage of non-interstate roadways increased by 8% from 74.5% in 2018 to 80.2% in 2019. This increase in reliable system mileage is indicative of achieving the RTP goal of moving people and goods efficiently, and exceeding performance targets of 63% reliable interstate mileage and 73% non-interstate mileage.

<b>Performance Measure</b>	<b>2018 Condition</b>	<b>2019 Condition</b>	<b>2022 Target</b>
Interstate LOTTR	64.4%	69%	69%
Non-interstate LOTTR	74.5%	80.2%	80%

*Peak hours excessive delay*

TTI ranks the annual hours of delay per driver in the Houston-Galveston Transportation Management Area. This measure is a systemwide measure while the delay per mile is tracked by segment.

Performance Measure	2018 Condition	2019 Condition	2022 Target
Peak Hour Excessive Delay	14	14	14

*Truck travel time reliability (TTTR) index*

TTTR assesses how reliable freight movement on the interstate is with a high standard of 95% on-time deliveries. Truck travel reliability in 2019 was 2.18, which is a 1% reduction from the 2018 score of 2.15. This means that a truck trip of 30 minutes requires 65 minutes for the truck to arrive on-time 95% of the time. This index is still within the performance target of 2.2.

Performance Measure	2018 Condition	2019 Condition	2022 Target
TTTR index	2.15	2.18	2.2

*Increase non single-occupancy vehicle trips*

Increasing non single-occupancy vehicle trips refers to increasing the percentage of those not commuting by driving alone in a car. Non SOV trips include telecommute, carpools, vanpools, transit, taxis, transportation networking companies (such as Uber and Lyft), bicycling, and walking. The 2022 target is lower due to the impact of the COVID-19 pandemic and expected short term negative impacts to transit and vanpooling usage.

The percentage of the region’s commuters who use an alternative mode of transportation to work at least once a week increase from 20% in 2018 to 21% in 2019, which exceeds to performance target of 20%. These modes include transit, vanpool, carpool, biking, walking, and telecommuting/teleworking. In Appendix A, we provide resources that can be used to identify where these options exist within the region and how they may provide congestion relieve to the CMP network.

Performance Measure	2018 Condition	2019 Condition	2022 Target
Non-Single Occupant Vehicle Trips	20.1%	21.1%	20.0%

## How Will We Identify Local Needs and Problems for Corridors or Segments?


For each local performance measure, we identify priority problem areas in the region. For metrics provided through the Texas A&M University Transportation Institute, a full list of segments in our region that are among the 100 most congested segments in the state are available at <https://mobility.tamu.edu/texas-most-congested-roadways/> and in Appendix C of this CMP. All segments that appear on this list are of concern.

## Measures Explained

### *Annual person-hours of delay per mile*

TTI ranks the most congested roadways in the state by measuring the total annual hours of extra travel time experienced by each roadway user during all times of day and dividing that total by the roadway length. This measure accounts for actual travel speed, free flow travel speed, roadway volume, and vehicle occupancy relative to the length of the roadway. Using this measure, the region has five of the top 10 most congested roadways in the state, including the most congested. The table below includes the top 10 most congested roadways in the region, along with the statewide rank, segment length, and the annual person-hours of delay per mile.

2019 Statewide Congestion Rank	Road Name	From	To	Segment Length	Annual Delay per Mile
1	W Loop Fwy / IH 610	Katy Fwy / IH 10 / US 90	Southwest Fwy / US 59 / IH 69	3.62	1,407,760
3	Southwest Fwy / IH 69 / US 59	W Loop Fwy / IH 610	South Fwy / SH 288	5.44	1,094,921
4	Eastex Fwy / IH 69 / US 59	SH 288	IH 10	3.03	961,140
6	Gulf Fwy / IH 45	IH 10 / US 90	S Loop E Fwy / IH 610	7.89	770,136
9	Katy Fwy / IH 10 / US 90	N Eldridge Pkwy	Sam Houston Tollway W / SL 8	3.28	649,542
11	N Loop W Fwy / IH 610	North Fwy / IH 45	Katy Fwy / IH 10 / US 90	6.22	605,689
12	North Fwy / IH 45	Sam Houston Tollway N	N Loop Fwy / IH 610	9.26	578,657
13	IH 10 / US 90	North Fwy / IH 45	Eastex Fwy / US 59	1.57	543,269
14	Katy Fwy / IH 10 / US 90	Sam Houston Tollway W / SL 8	W Loop N Fwy / IH 610	6.62	509,813
17	North Fwy / IH 45	N Loop Fwy / IH 610	IH 10 / US 90	3.11	483,306

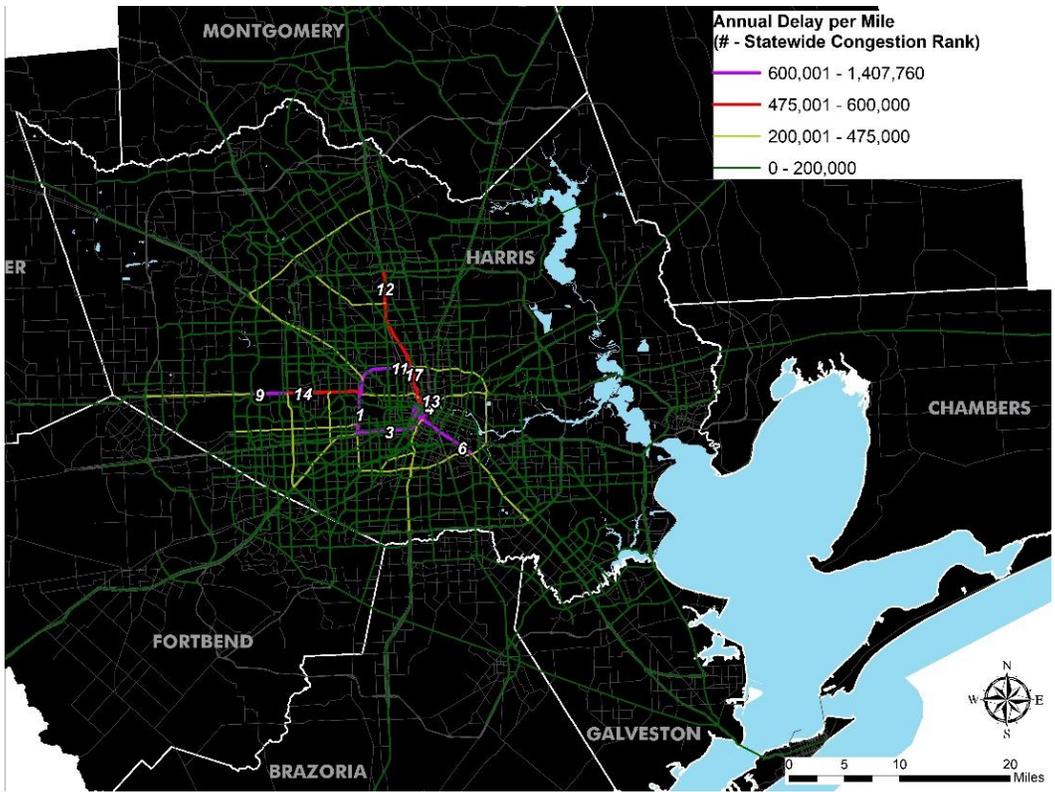


*Texas congestion index*

This congestion index is calculated by TTI to compare the peak-period average travel time and the free flow travel time. The score is arrived at by dividing the congested (peak hour) travel time by the free flow travel time. A score of 1.0 would mean that the average travel time during peak hours is identical to free flow conditions and therefore not a congestion concern. However, a score of 2.0 would mean that it would take, on average, twice the time during peak hours to travel the same segment during free flow conditions. This calculation does not account for traffic volumes or vehicle occupancy. Below is a table of the top 10 most congested roadways in the region based on this travel time index.

2019 Statewide Congestion Rank	Road Name	From	To	Texas Congestion Index
4	Eastex Fwy / IH 69 / US 59	SH 288	IH 10	2.4
1	W Loop Fwy / IH 610	Katy Fwy / IH 10 / US 90	Southwest Fwy / US 59 / IH 69	2.32
3	Southwest Fwy / IH 69 / US 59	W Loop Fwy / IH 610	South Fwy / SH 288	1.99
11	N Loop W Fwy / IH 610	North Fwy / IH 45	Katy Fwy / IH 10 / US 90	1.85
13	IH 10 / US 90	North Fwy / IH 45	Eastex Fwy / US 59	1.83


6	Gulf Fwy / IH 45	IH 10 / US 90	S Loop E Fwy / IH 610	1.75
9	Katy Fwy / IH 10 / US 90	N Eldridge Pkwy	Sam Houston Tollway W / SL 8	1.75
19	South Fwy / SH 288	Gulf Fwy / IH 45	S Loop W Fwy / IH 610	1.66
27	Cypress Creek Pkwy / FM 1960	Tomball Pkwy / SH 249	North Fwy / IH 45	1.61
17	North Fwy / IH 45	N Loop Fwy / IH 610	IH 10 / US 90	1.58
18	Katy Fwy / IH 10 / US 90	W Loop N Fwy / IH 610	North Fwy / IH 45	1.58
39	FM 1960	Tomball Pkwy / SH 249	Northwest Fwy / US 290	1.58
43	South Fwy / SH 288	S Loop W Fwy / IH 610	Sam Houston Tollway S / SL 8	1.58

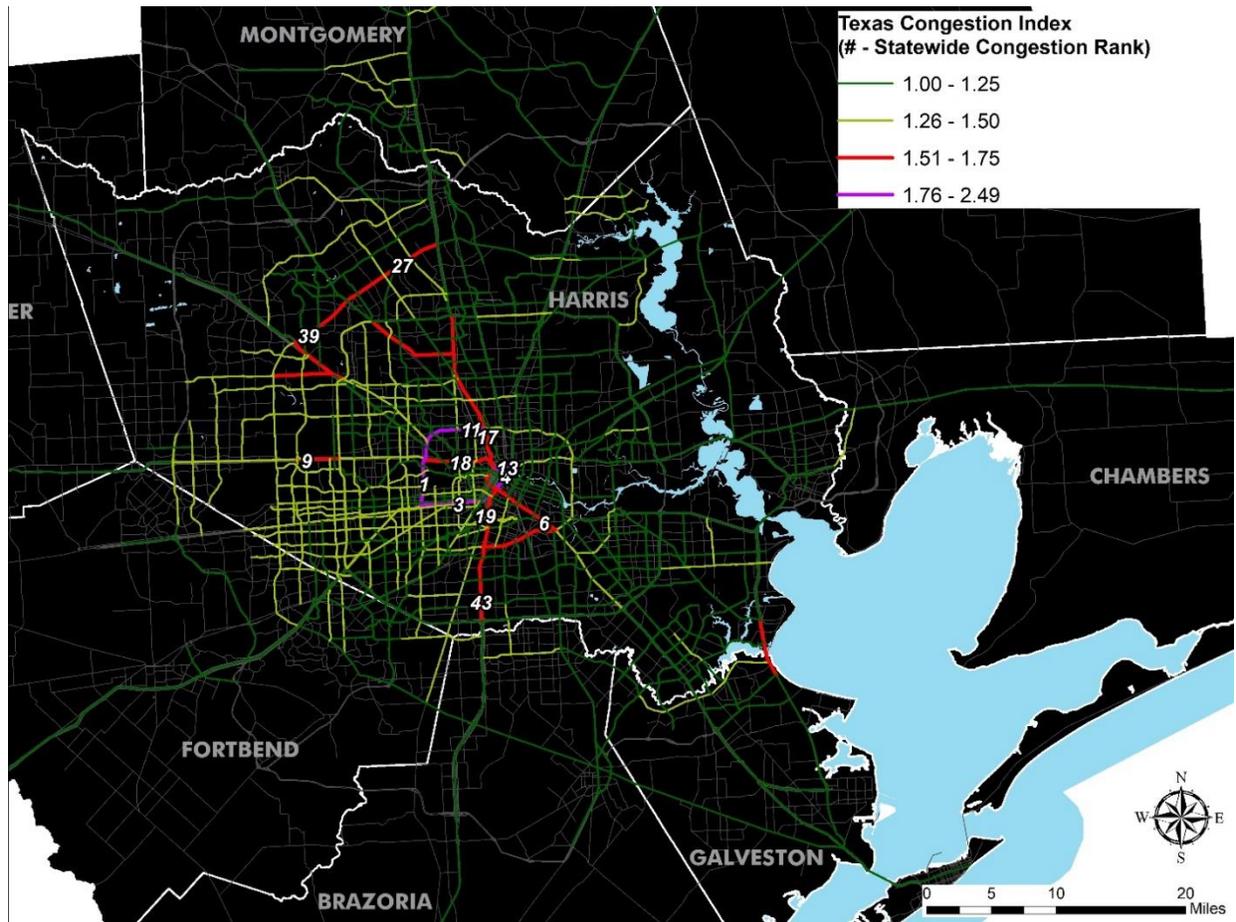

*Annual truck delay per mile*

Similar to the total annual hours of delay for all users per mile discussed above, TTI has calculated the total annual hours of extra travel time experienced by trucks during all times of day and dividing that total by the roadway length. This measure accounts for actual travel speed, free flow travel speed, and truck volume relative to the length of the roadway. The table below includes the top 10 most congested roadways in the region for trucks using this measure.

2019 Statewide Congestion Rank	Road Name	From	To	Segment Length	Annual Truck Delay per Mile
4	Eastex Fwy / IH 69 / US 59	SH 288	IH 10	3.03	59,782
1	W Loop Fwy / IH 610	Katy Fwy / IH 10 / US 90	Southwest Fwy / US 59 / IH 69	3.62	54,415
6	Gulf Fwy / IH 45	IH 10 / US 90	S Loop E Fwy / IH 610	7.89	54,222
13	IH 10 / US 90	North Fwy / IH 45	Eastex Fwy / US 59	1.57	47,116
9	Katy Fwy / IH 10 / US 90	N Eldridge Pkwy	Sam Houston Tollway W / SL 8	3.28	39,101
3	Southwest Fwy / IH 69 / US 59	W Loop Fwy / IH 610	South Fwy / SH 288	5.44	36,994
11	N Loop W Fwy / IH 610	North Fwy / IH 45	Katy Fwy / IH 10 / US 90	6.22	34,779
12	North Fwy / IH 45	Sam Houston Tollway N	N Loop Fwy / IH 610	9.26	31,397
18	Katy Fwy / IH 10 / US 90	W Loop N Fwy / IH 610	North Fwy / IH 45	5.65	30,155
14	Katy Fwy / IH 10 / US 90	Sam Houston Tollway W / SL 8	W Loop N Fwy / IH 610	6.62	28,002

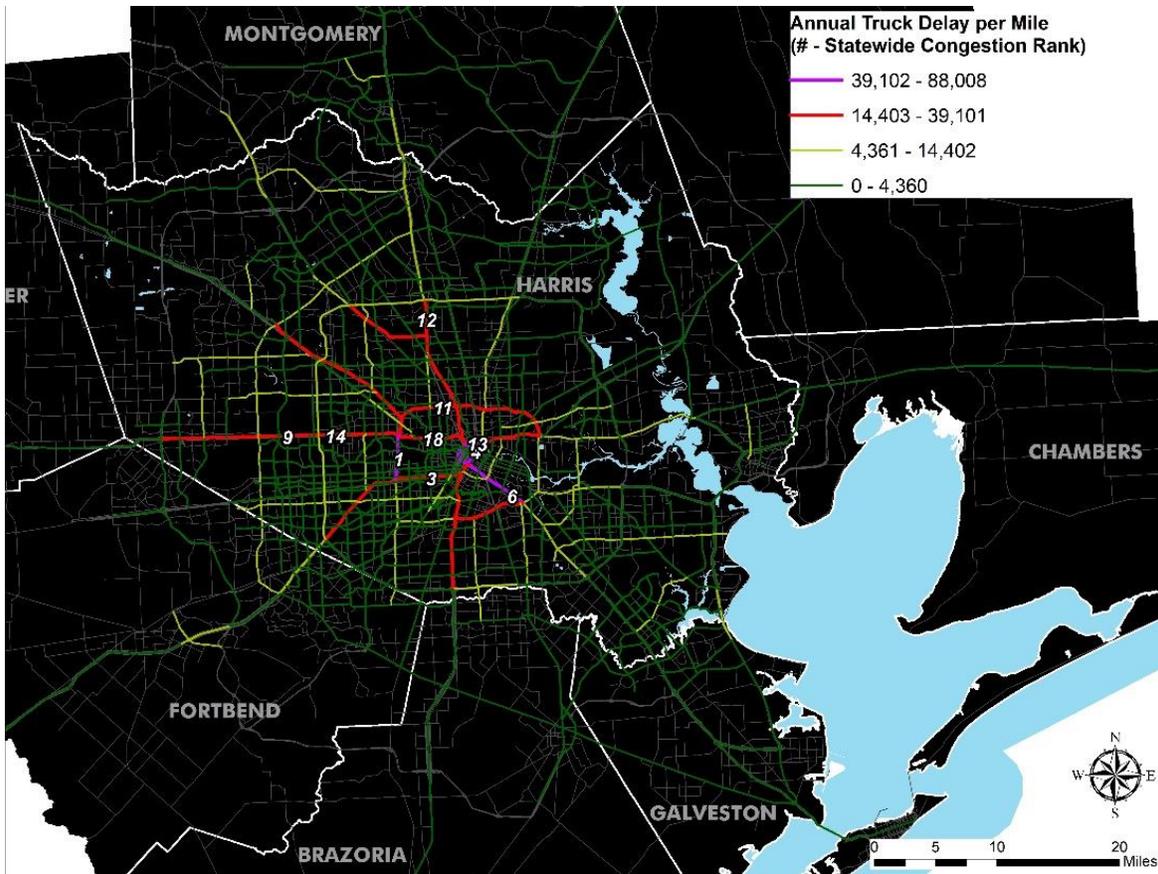


*Texas congestion index (trucks only)*

As discussed above, this index is calculated by TTI to compare the peak-period average travel time for truck traffic and their free flow travel time. A score of 1.0 would mean that the average travel time during peak hours for trucks only is identical to free flow conditions and therefore not a congestion concern. However, a score of 2.0 would mean that it would take, on average, twice the time during peak hours for trucks to travel the same segment during free flow conditions. This calculation does not account for truck volumes. Below is a table of the top 10 most congested roadways in the region based on this truck travel time index.


2019 Statewide Congestion Rank	Road Name	From	To	Texas Congestion Index (trucks only)
1	W Loop Fwy / IH 610	Katy Fwy / IH 10 / US 90	Southwest Fwy / US 59 / IH 69	2.44
4	Eastex Fwy / IH 69 / US 59	SH 288	IH 10	2.43
3	Southwest Fwy / IH 69 / US 59	W Loop Fwy / IH 610	South Fwy / SH 288	2.08

6	Gulf Fwy / IH 45	IH 10 / US 90	S Loop E Fwy / IH 610	1.83
13	IH 10 / US 90	North Fwy / IH 45	Eastex Fwy / US 59	1.82
11	N Loop W Fwy / IH 610	North Fwy / IH 45	Katy Fwy / IH 10 / US 90	1.8
19	South Fwy / SH 288	Gulf Fwy / IH 45	S Loop W Fwy / IH 610	1.76
9	Katy Fwy / IH 10 / US 90	N Eldridge Pkwy	Sam Houston Tollway W / SL 8	1.71
43	South Fwy / SH 288	S Loop W Fwy / IH 610	Sam Houston Tollway S / SL 8	1.64
157	Spencer Rd / FM 529	SH 6	Northwest Fwy / US 290	1.64

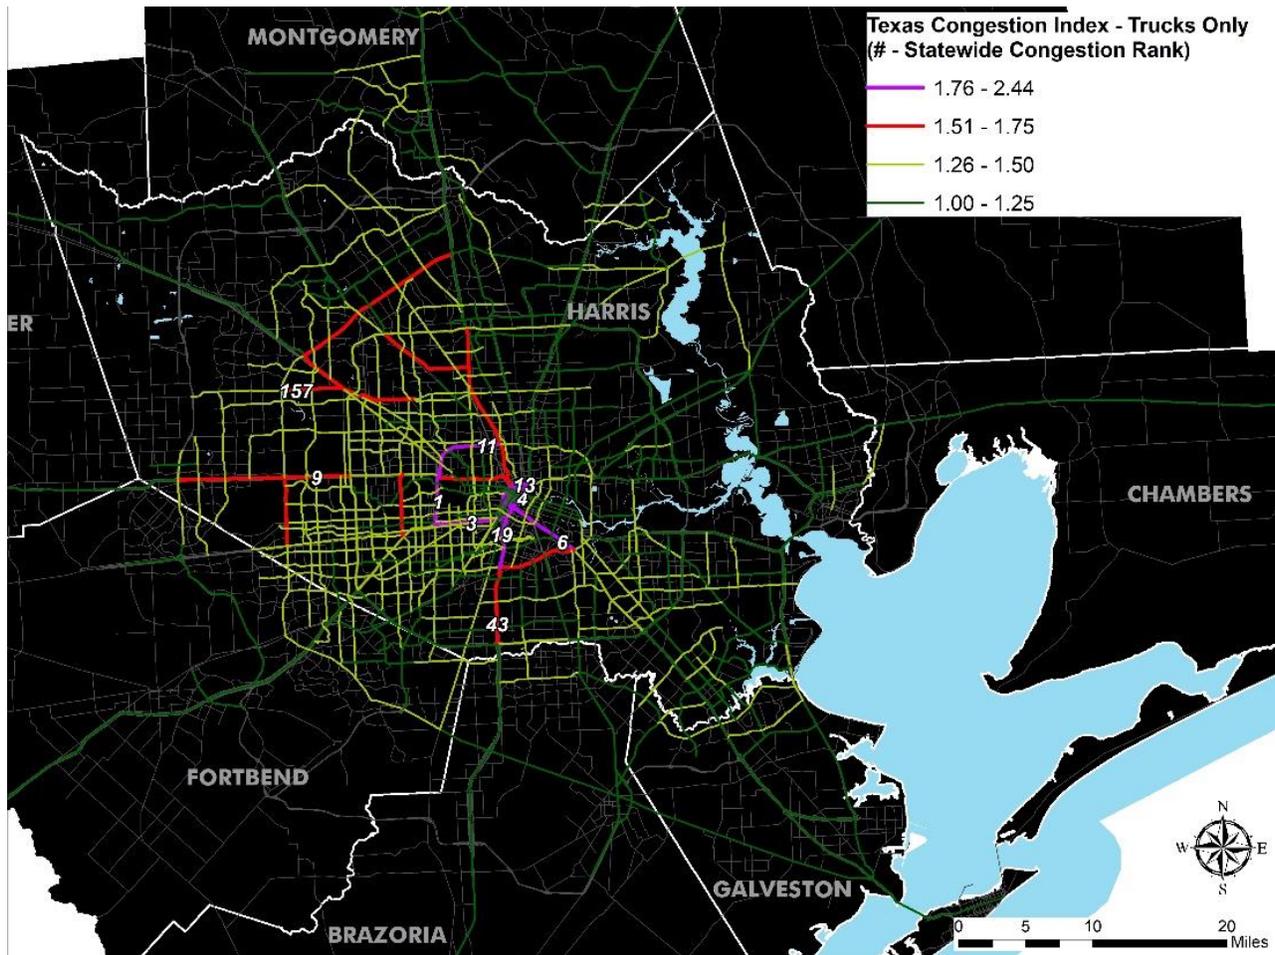

*Commute choice*

The region has a high portion of employees who work in and around the downtown Houston area and live outside of the downtown area. Identifying areas of the region with the highest rates of commuters who drive alone to this area will indicate where carpooling or park and ride lots should potentially be located. The map below shows Census tract areas in red with high drive alone percentages. Additional information on drive alone percentages and origin and destinations throughout the region can be found using H-GAC's interactive applications, Regional Demographic Snapshot and Regional Commute Flow Map at <https://www.h-gac.com/interactive-web-applications/>.

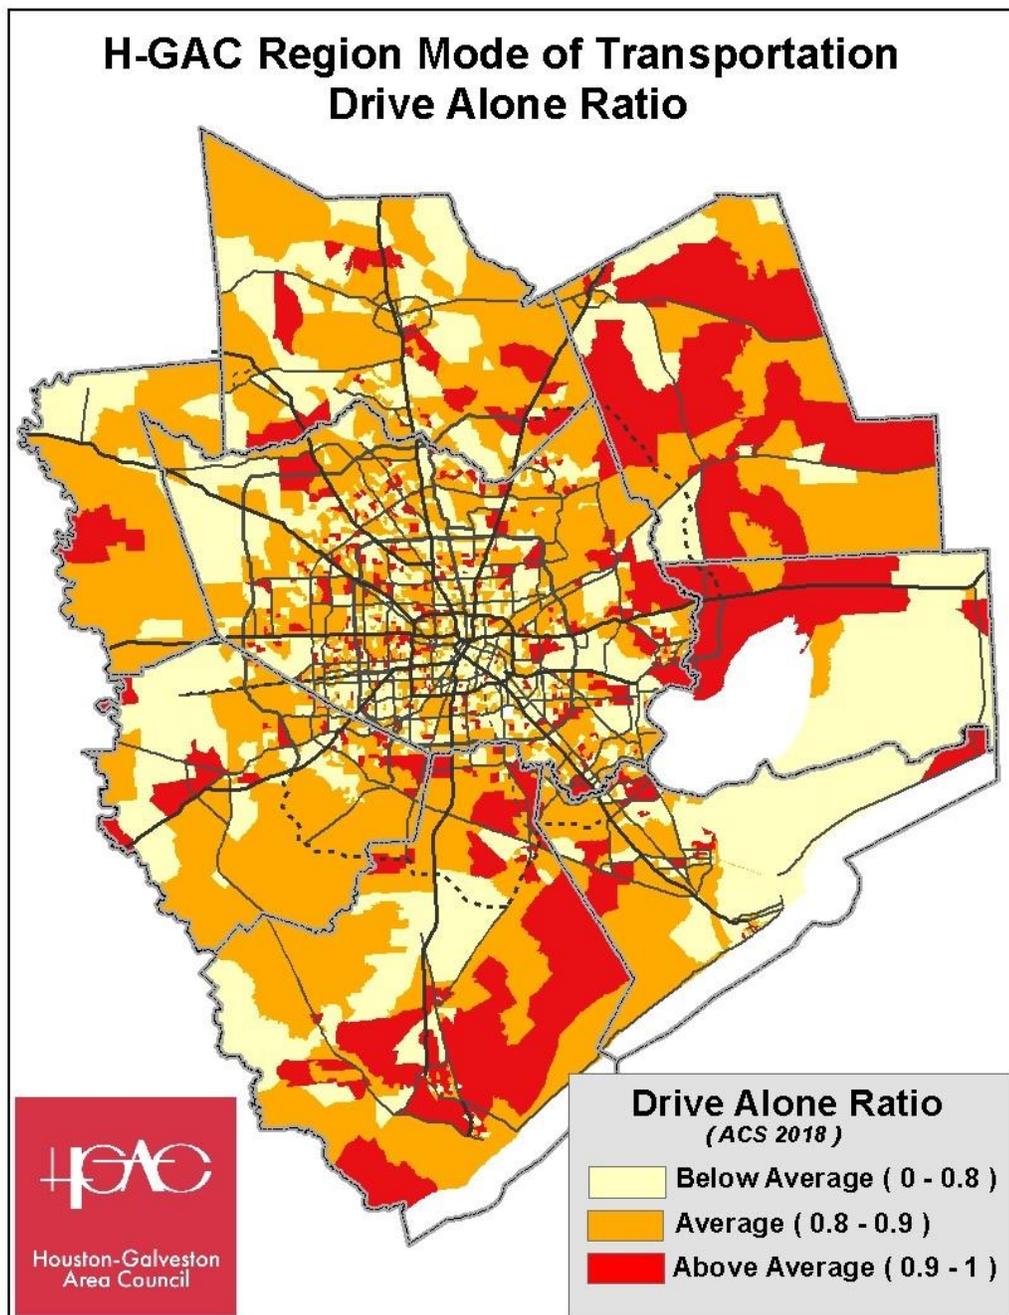

## SECTION 6 – CONGESTION MANAGEMENT STRATEGIES

Strategies that move people and goods efficiently include an array of projects and programs identified in H-GAC's Commute Solutions program, local and regional planning documents, and other agency best practices. These strategies are achievable and consistent with the character and needs of the Houston region's land use and transportation system, and with the congestion management process objectives defined in section 2. This chapter identifies various strategies to improve the efficient movement of people and goods and describes the region's methods for assessing the impact of those strategies.

### What Congestion Management Strategies Should be Used?

This CMP suggests strategies that influence travel behavior and mode choice, while leaving as a last resort high-cost capacity increases that primarily serve single-occupant vehicle travel. The strategies all support our regional goals and objectives and fall into seven main categories: 1) transportation/travel demand management, 2) land use, 3) public transportation, 3) intelligent transportation system (ITS) and transportation systems management, 4) roadway/mobility, 5) bicycle and pedestrian, 6) roadway capacity expansion, and 7) freight.

They also utilize one or more of the following approaches:

1. Provide the infrastructure to walk, bike, or use transit
2. Enable living, working, and playing within proximity
3. Provide other influences to discourage single-occupant vehicle trips
4. Consider alternatives of transport of goods by truck

#### ***Travel Demand Management***

Transportation demand management (or TDM) strategies expand mode choice; market to and educate users of travel options; and outline pricing strategies that influence travel behavior and mode choice. The cost of these strategies tends to be low to moderate (or they can generate revenue) and have benefits such as reducing peak period travel and reducing single-occupant VMT. These provide several environmental benefits, including improved air quality and reduced greenhouse gas emissions. TDM strategies can be grouped well with various land use, public transportation, and bicycle and pedestrian strategies.

Pricing strategies place value on how and when travelers utilize roadways and parking facilities. These are regulatory in nature and can influence travel behavior and mode choice. Pricing can be categorized into legislative, congestion tolling, and parking management strategies. Pricing, especially dynamic pricing, can discourage single-occupancy vehicle trips during peak hours and encourage a shift to other modes.

Legislative pricing is deployed by states to place a value on how often drivers access all public roadways. Emissions pricing, VMT fees, pay-as-you-drive insurance, and vehicle restriction zones are all legislative regulations that discourage the frequency, length, and location of vehicle trips.

Congestion tolling applies a premium to traveling along critical corridors during peak hours. Parking management strategies influence the utilization of on- and off-street parking facilities to create parking opportunities for those willing to pay for convenience. The revenue can be used to maintain, improve, and promote transit, biking, and walking facilities. An additional transportation demand management strategy is to establish transportation management associations (TMAs). These provide transportation services, such as organizing vanpools, through public-private partnerships in specific high-activity employment or commercial areas.

TDM Strategies		Approach
<b>Trip Choice</b>	Telecommuting	1,2
	Rideshare	1
	Car share	1
	Guaranteed ride home	1
	Alternative work hours	1
	Transportation management associations	1,3
<b>Education</b>	Commuter travel options material (Commute Solutions)	1,3
	Alternative mode event promo	1,3
	Bicycle / Pedestrian educational material	1,3
<b>Legislative Pricing</b>	Regional excise tax	3
	Congestion pricing	3
	Carbon pricing tax	3
	Emissions-based registration fee	3
	Pay-as-you-drive insurance	3
<b>Congestion Tolling</b>	Traditional toll lanes	1,3
	High-occupancy toll lanes	1,3
<b>Parking Management</b>	Preferential parking	1,3
	Dynamic parking pricing	3

*Note: Home delivery services for goods and services had increased significantly prior to the advent of the COVID-19 pandemic. Since the start of the pandemic, delivery of goods and services has grown dramatically, affecting travel patterns for shopping trips. How they impact congestion is uncertain, and no travel models have been developed. Its impact is worthy of future inquiry.*

### Land Use

Effective land use strategies are related to the built environment and enable living, working, and playing within proximity to decrease SOV trips; increasing walk, biking, and transit trips; and providing air quality benefits to the region. Design guidelines are important components to creating transit-friendly environments that align with the H-GAC Livable Centers initiative. Land use strategies generally have low to moderate costs and tend to involve the establishment of ordinances and the potential need for economic incentives that will encourage developer buy-in.

Land Use Strategies		Approach
<b>Design Guidelines</b>	Mixed-use development	2
	Infill and densification	2
	Transit-oriented development (TOD)	1,2
	Pedestrian-oriented development (POD)	1,2
	Efficient land use development practices	2
	Curbside management	1

### ***Public Transportation***

Public transportation strategies include pricing and payment conveniences, increasing route coverage and frequency, improving stop access and amenities, providing operational efficiencies, and other technological improvements. These strategies range in cost from low to high. Constructing new transit corridors is understandably costlier than improving service frequencies. Predominant benefits of improving accessibility and user-friendliness include shifting mode share, increasing transit ridership, reducing VMT, and improving air quality. These work well as Complete Streets improvements alongside bicycle and pedestrian strategies, and land use strategies that enable living, working, and playing within proximity.

Public Transportation Strategies		Approach
<b>Convenience Pricing</b>	Reduced fares	3
	Electronic fare collection	3
	Electronic payment system / Universal fare pass	3
	Employer incentives	3
<b>Access Convenience</b>	Park & ride lots	1
	Intelligent transit stops	1
	Enhanced vehicle amenities	1
	Improved bike/ped facilities	1
	Intermodal enhancements	1
<b>Service Operations</b>	Increased service	1
	Local circulator	1
	High-occupancy vehicle lanes	1
	Rail transit	1

	Guideways	1
	First mile/last mile	1
	Dedicated right of way	1
	Rail extension	1
	Realigned transit service	3
	Transit jump lanes	1
	Bus rapid transit	1
	Express bus service	1

### ***Intelligent Transportation System and Operations***

Intelligent transportation system (ITS) and transportation system management (TSM) strategies are intended to make the best use of existing roadway capacity. Strategies include signal coordination, highway ramp metering, traveler information systems, incident management, and service patrols. Costs vary and tend to be low to moderate. Large scale projects that involve the construction of new infrastructure and devices tend to be higher in cost than other projects. Benefits include reduced travel time, reduced stops, reduced delays, and improved safety.

<b>ITS / Operations Strategies</b>		<b>Approach</b>
<b>Operational</b>	Traffic signal coordination	1
	Transit signal prioritization	1
	Provide non-motorized signal installation	1
	Reversible traffic lanes	1
	Sustained enforcement	1
	Incident management (Tow and Go)	1
	Incident detection system	1
	Service patrols	1
	Ramp metering	1
	Road weather management	1
	Traffic surveillance and control systems	1
	Speed harmonization	1
	Special event / Work zone management	1
	Electronic toll collection	1
<b>Informational</b>	Advanced traveler information	3
	Transit vehicle travel information	3

### ***Bicycle and Pedestrian***

These strategies facilitate a shift to walking and biking as a viable mode for trips by providing new sidewalks and bicycle lanes, improved facilities near transit stations, bike sharing, and exclusive non-

motorized rights of way (streets dedicated to non-motorized traffic only). Benefits include decreasing single-occupancy vehicle trips, VMT, and improving regional air quality, decreasing single occupant trips, and increasing multimodal travel. Costs of these strategies tend to be low to moderate and work well when grouped with transit and other strategies as part of Complete Streets improvement.

<b>Bicycle and Pedestrian Strategies</b>		<b>Approach</b>
<b>Facility</b>	New sidewalks	1
	New Bike lanes	1
	Bike/Ped facility near bus stop	1
	Accessibility Improvements	1
<b>Safety</b>	Context appropriate travel speeds	1
	Complete Streets design standards	1
	Pedestrian Scale Lighting	1
	Exclusive right of way / Open street	1
<b>Services</b>	Bike share	1
<b>Education</b>	Bike safety training	1

### **Roadway/Mobility (Non-ITS)**

These strategies are designed to help improve system operations and relieve bottlenecks on existing facilities through non-capacity adding improvements. This includes access management improvements (limiting the number of curb cuts), turning restrictions at key intersections, and adoption of a Complete Streets policy. These strategies range in cost from low to high based on the type and complexity of strategy implemented. They may be grouped with improved signage and ITS/operations strategies for additional benefits especially when in alignment with the latest ASHTO standards and TxDOT’s new call for Vision Zero.

<b>Roadway / Mobility Strategies</b>		<b>Approach</b>
<b>Design Guidelines</b>	Access management	1
	Restricting turns	1
	Convert to one-way	1
	Road signage improvement	1
	Roadway diet, right-sizing or reallocation	1
	Grade separation (no added capacity)	1
	Acceleration/Deceleration lanes	1
	Intersection improvements, pedestrian islands	1,2
	Complete Streets policy	1,2

## ***Roadway Capacity Expansion***

Highway strategies that add roadway capacity include the construction of a new roadway or bypass, road widening to add through lanes, adding capacity to an existing interchange, or grade separation of existing intersections (that add capacity). Adding capacity should be considered the strategy of last resort due to stresses on public resources related to sprawl.

These strategies range in cost from moderate to high based on the type of strategy implemented, with new right-of-way resulting in higher costs than design improvements. Predominant benefits of these strategies include increased capacity as well as improved mobility and traffic flow. These types of roadway projects and strategies may be coupled with improved signage and ITS/operations strategies for additional benefits to travelers.

<b>Roadway Capacity Expansion Strategies</b>		<b>Approach</b>
<b>Facility</b>	New freeways	1
	Add travel lanes	1
	New arterial roadways	1
	Grade separation (add capacity)	1
	Rail grade separation	1
	Intersection improvement	1

## ***Freight Mobility***

Freight strategies work to enhance the mobility of goods and the reliability and safety of the Regional Freight Network. These multimodal strategies range in cost from relatively low for strategies such as wayfinding signage and truck lane striping on freight impacted roads to high cost for freight shuttles on a separate right of way. The benefits of freight mobility strategies include reduced truck trips, reduced emissions, increased economic competitiveness, and improved safety.

<b>Freight Mobility Strategies</b>		<b>Approach</b>
<b>Facility</b>	Dedicated truck lanes	1,2
	Freight shuttle (reserved right of way)	1,2
	Truck parking expansion	1,2
	Comprehensive interconnected pipeline system	1,2
	Maintenance and use of Gulf Intercoastal Waterway	1,2

<b>Design Guidelines</b>	Geometric roadway design improvements (turning radii, ramp configurations)	4
	Intermodal connector improvements	4
	Implementation of 18'6 ft vertical clearances on regional freight routes	4
<b>Informational</b>	Regional freight traveler information system	4
	Queue detection at port terminals	4
	Expansion of truck parking availability system (TPAS)	4
	Virtual container yard/Matchback system	4
	Weigh in motion technology	4
<b>Operational</b>	Comprehensive traffic management centers	4
	Tow and Go program for heavy duty vehicles	4
	Container on barge	4
	Congestion tolling	4
<b>Education</b>	Educate local jurisdictions, businesses, communities, and decisionmakers about the economic importance of moving freight efficiently	4
	Educate the public about safety issues related to multimodal freight transportation	4

## How Should These Strategies be Evaluated?

There are many ways to evaluate and measure congestion. Below we list the methods we currently use as well as a few others that could be used in conjunction with existing practices. A summary of each analysis method is presented below. The congestion management strategies listed above, and analysis methods mentioned below, together make up the regional congestion management toolbox.

### **Intelligent Transportation System Deployment Analysis System (IDAS)**

The Intelligent Transportation System Deployment Analysis System (IDAS) is an ITS/operations sketch-planning analysis tool that interfaces with planning data prepared from existing regional travel demand models. IDAS was first developed in 1998 for the Federal Highway Administration (FHWA) and was updated several times through the 2000s. IDAS provides a comprehensive analysis tool for determining the system, subarea, corridor-specific impacts, benefits, and costs of the full spectrum of operations and ITS deployments and strategies. IDAS was designed to meet the needs of MPOs by offering the capability for a systematic assessment of operations and ITS with one analysis tool, with the overall goal of assisting these agencies in integrating ITS into their ongoing transportation planning process. Although IDAS has not been used by H-GAC in the past, it could be linked with the Regional Travel Model to assess the impacts of various operations, ITS, and roadway capacity projects as defined in the CMP toolbox.

## **FIXiT 2.0**

Future Improvement Examination Technique (FIXiT) is a sketch planning tool used to provide broad estimates of the benefits of congestion strategies applied to different projects. FIXiT was developed by the Texas A&M University Transportation Institute in 2012. It allows agencies to compare strategies to determine which ones provide the “greatest benefit per dollar”. FIXiT can provide information at macroscopic (systemwide) and mesoscopic (corridor) levels.

## **LOSPLAN**

Currently, congestion mitigation analysis is required to justify adding SOV capacity to transportation facilities. This is conducted using the Florida Department of Transportation (FDOT) level of service software known as LOSPLAN. LOSPLAN was developed by the Transportation Research Center at the University of Florida for FDOT as stand-alone computational application that employs the 2010 Highway Capacity Manual methodologies for automobiles and other leading methodologies for the bicycle, pedestrian, and bus modes to compute level and quality of service for planning and preliminary engineering. LOSPLAN can compute both level of service for roadways as well as volume to capacity ratio.

## **Regional Travel Demand Model**

H-GAC’s traditional four-step Regional Travel Demand Model is used to support a variety of analytical needs such as preparation of various system and subarea analyses, including the RTP, transit projects, toll projects, ongoing evaluations of the region’s air quality conformity analysis, and other technical analyses. In some cases, the results from the Regional Travel Model will be used to assess the impacts of alternative strategies, specifically the additional system capacity (freeway, arterial roadway, and new roadway facility construction) projects.

Regional travel demand model outputs (VMT, VHT, and other measures) can be used to illustrate the location, duration, and extent of congestion for the region at baseline conditions. The travel demand model can then be used to forecast congested conditions assuming currently programmed TIP projects. These model outputs can in turn be used as inputs into the ITS Deployment Analysis System (IDAS), the Tool for Operations Benefit/Cost (TOPS-BC), and/or other tools to calculate a variety of performance measures to evaluate the impacts of many of the types of strategies in the toolbox. They can also help allocate benefits to subregions. These data can include changes in travel time, speed, mode share, or trip reduction, for example, that can either directly measure or indirectly measure the CMP performance measures for the no-build and build conditions.

## **Simulation Model**

Simulation models are designed to assess the travel impacts of multimodal and roadway specific projects. The use of simulation models requires that the analysis area be relatively constrained to a small subarea of the regional network, usually a corridor or specific project area. Expansion of the analysis to a broader region would require significantly more resources. These models are effective in evaluating the buildup, dissipation, and duration of traffic congestion, and model outputs can be used to calculate measures of effectiveness such as vehicle/person miles traveled, vehicle/person hours of travel, travel time/queue length, throughput/delay, emissions, and fuel consumption. Simulation results can be used to conduct a benefit valuation of individual strategies or set of strategies. Information on calculation of various measures of effectiveness using simulation outputs is available in FHWA’s Traffic

Analysis Toolbox. Emerging methods for using simulation model outputs to calculate travel time reliability impacts are detailed in SHRP 2 projects L04, L05 (Technical Reference), and L08.

### **Tool for Operations Benefit/Cost (TOPS-BC)**

TOPS-BC is one of several benefit/cost tools that can be used to evaluate operational and ITS improvements. An early generation of spreadsheet tools was developed by FHWA and state and local agencies for targeted analysis, including SCRITS and CAL-B/C4. Following these initial efforts, FHWA developed the ITS Deployment Analysis System (IDAS), which included a network-based model able to incorporate regional and statewide travel demand models. The major benefit of IDAS is that by using existing travel demand models, it incorporates the same set of assumptions used for other regional planning activities. The inclusion of an assignment module also allows analysts to account for traffic shifts that may result from operational and ITS deployments. As a network model, however, IDAS has a steeper learning curve than spreadsheet tools and may require a level of effort beyond what is feasible for a relatively limited improvement.

TOPS-BC essentially reflects the incorporation of IDAS into a spreadsheet format, which is accessible to a wider range of users and provides relatively quick assessments of ITS and operational projects with limited data. The tool is supported by the U.S. Department of Transportation's benefit and cost databases, allowing users to access and incorporate national experience in impact measurement.

Two separate versions are available: the standard version and the development version. The TOPS-BC User's Manual provides more instructions on how to use the tool, along with some case studies.

Due to the characteristics described above, TOPS-BC is recommended as a key method for evaluating congestion management for H-GAC and its planning partners, as it provides the following features:

- The ability to investigate the expected range of impacts associated with previous deployments and analyze many transportation system management and operational strategies
- A screening mechanism to help identify appropriate tools and methodologies for conducting a benefit-cost analysis based on analysis needs
- A framework and default cost data to estimate the life-cycle costs (including capital, replacement, and continuing operating and maintenance costs) of various transportation system management and operational strategies
- A framework and suggested impact values for conducting simple sketch planning level benefit-cost analysis for selected transportation system management and operational strategies

### **Trip Reduction Impacts of Mobility Management Strategies (TRIMMS)**

TRIMMS is a modeling tool developed by the Center for Urban Transportation at the University of South Florida. It provides TDM cost-benefit analysis of strategies that directly affect the cost of travel, such as pricing (subsidies, mile-based charges) and travel time. It also provides this analysis for employer based TDM support, such as telecommuting, alternative work schedule, and program support strategies (e.g., guaranteed ride home).

TRIMMS considers program costs and annualized benefits – such as air pollution (VOCs, CO, NOx), added congestion, excess fuel consumption, global climate change (CO<sub>2</sub>), health and safety, and noise pollution – and provides this analysis at a regional or worksite level. User-defined or default inputs and elasticity parameters can be selected. Results predict mode share and VMT changes, annualized peak and off-peak costs and benefits, changes in emission pollutants (VOCs, CO, CO<sub>2</sub>, NOx) and estimates regarding the probability of reaching the desired cost-benefit ratio.

## SECTION 7 – IMPLEMENTATION STRATEGIES

This section describes how congestion management process projects are programmed and implemented through inclusion of CMP strategies in the Regional Transportation Plan (RTP), Transportation Improvement Program (TIP), sub-regional plans, and the Regional ITS Architecture. It also presents a process for conducting a CMP project level analysis for various transportation investment types.

### How Should the CMP be Integrated with Regional Planning and Programming Documents?

This section describes how the CMP coordinates with regional plans, including the Regional Transportation Plan (RTP), Transportation Improvement Program (TIP), corridor plans, and the Regional ITS Architecture. The CMP informs and receives information from these planning and programming documents.


#### ***Regional Transportation Plan (RTP)***

The RTP provides a framework for the long-range achievement of the Houston-Galveston MPO region's transportation system goals, objectives, and strategies. Updated every four years, the RTP is a multimodal plan that identifies all regionally significant projects and programs planned regardless of the likely funding source. Once a project is included in the RTP, it proceeds through the project development process, including environmental review, preliminary engineering, and right-of-way acquisition. The CMP is an integral part of the long-range planning process and relates to the RTP in the following ways:

- The RTP's vision statement and goals inform the development of CMP's goals, objectives, and performance measures.
- The CMP provides problem areas and strategies that contribute to the RTP's recommendations for future study areas and investment priorities.
- The CMP toolbox provides strategies for developing and evaluating projects and programs that maintain or reduce congestion.
- The CMP defines a process for programming and implementing the most cost-effective strategies by introducing them into the RTP process and subsequently for programming into the TIP.
- Once projects are implemented, the CMP provides a mechanism for ongoing system monitoring, both to assess the performance of the system and to evaluate the effectiveness of the congestion management strategies that have been implemented.

Figure 7.1 shows how the CMP is integrated into various technical and policy components of the transportation planning process. The next RTP update will provide policy direction based on analysis and the program or geography-specific knowledge gained through the CMP. The RTP then sets the direction for the next cycle of these planning efforts.

**Figure 7.1: Integration of the Congestion Management Process in the Transportation Planning Process**

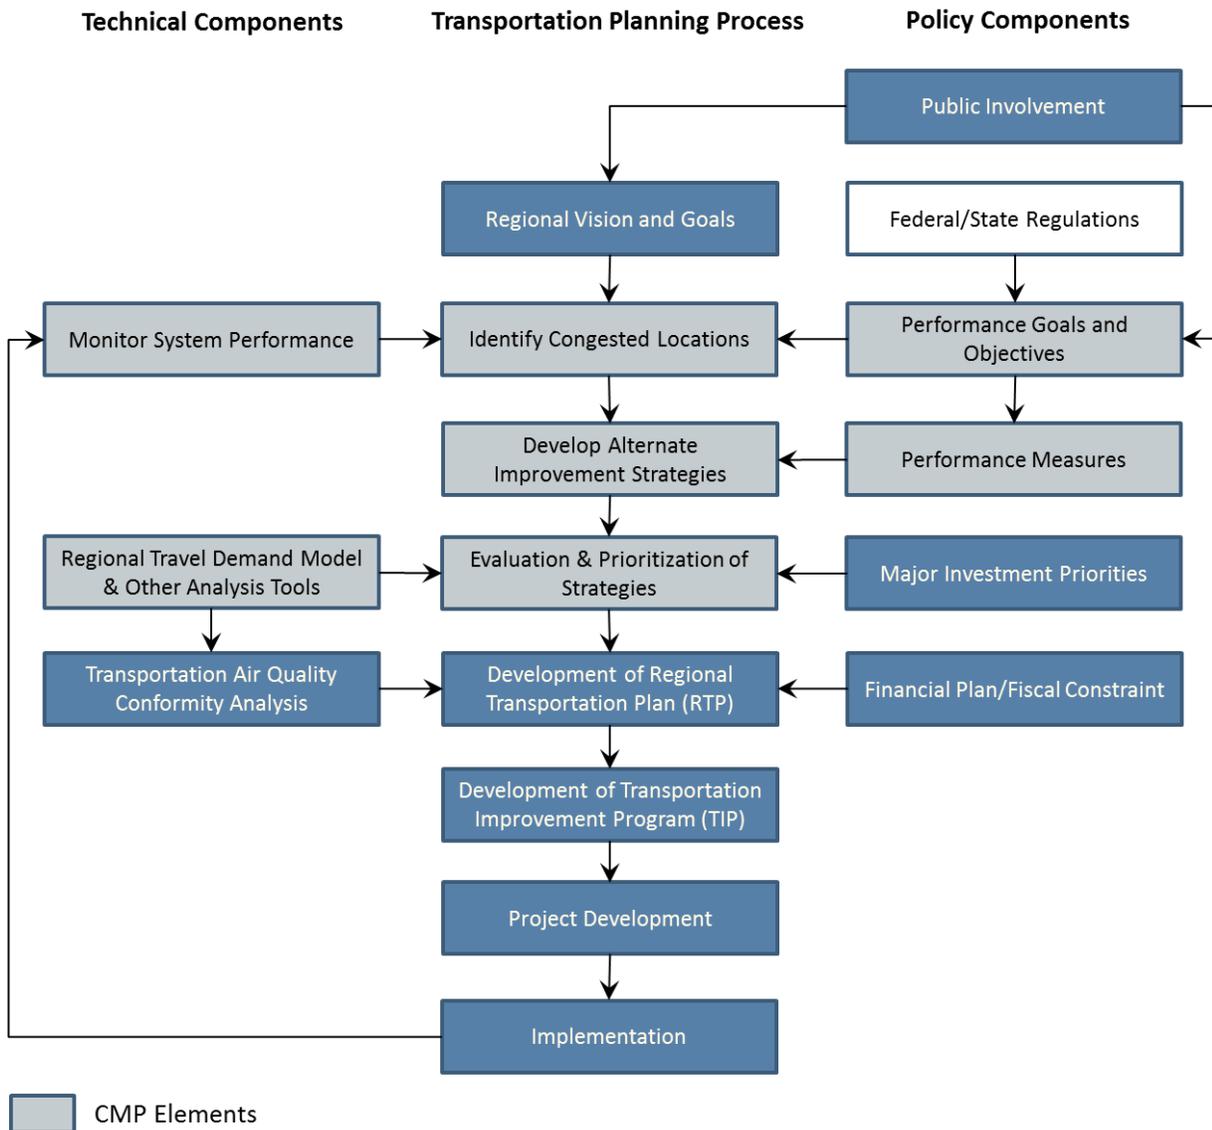

Source: Adapted from *The Transportation Planning Process: Key Issues - A Briefing Book for Transportation Decisionmakers, Officials, and Staff*, Updated September 2007, Publication No. FHWA-HEP-07-039, <http://www.planning.dot.gov/documents/BriefingBook/BBook.htm>

## ***Transportation Improvement Program (TIP)***

The Transportation Improvement Program is a short-range program that identifies the highest priority projects and programs to be funded and implemented in the Houston region over the next four years. The program identifies federal, state, and local funding for transportation projects that will be implemented within the TIP's four-year timeframe. Updated every two years, the TIP is the implementation plan for projects in the RTP.

H-GAC staff establish evaluation criteria for projects to be added to the TIP in coordination with the TIP subcommittee. The criteria established supports the goals and investment strategies of the Regional Transportation Plan. The project selection process established by H-GAC primarily includes a cost-benefit analysis where safety, delay, and air quality emissions benefits are calculated and included in the project score. Additionally, planning factor narratives are submitted with the projects. These narratives are scored and included in the final project score. Once projects are selected, added capacity projects are evaluated using the Congestion Mitigation Analysis tool. Projects that meet the CMP thresholds (level or improved Level of Service or Volume to Capacity ratio) are added to the TIP for implementation.

In addition to the programming of surface transportation projects, the CMP strategies adopted by the TPC are funded through a set-aside of funds. Programs such as Commute Solutions and Tow and Go are funded from set-aside funds. Funding for these programs is also included in the TIP document.

## ***Project Development/NEPA Process***

The CMP supports the link between planning and project development by providing information to support project development activities, including corridor alternatives analysis and environmental analyses conducted under the National Environmental Policy Act (NEPA). The CMP relates to these processes in the following ways:

- The CMP provides system performance information that can be used by H-GAC to identify corridors or segments in need of detailed analysis through corridor and NEPA studies.
- Documentation of the need for capacity enhancement (based on the analysis of alternative strategies) should be included in the NEPA project purpose and need statement.
- The CMP toolbox provides a starting point for identifying alternative congestion mitigation strategies for consideration in corridor and NEPA studies. Corridor/NEPA documents should include a discussion of how the CMP toolbox strategies were considered.
- Congestion mitigation strategies are evaluated as an alternative to the added capacity improvement. If the CMP alternative alone cannot meet the travel demand needs in the corridor, supplemental corridor-level CMP strategies that complement the major investment are considered to improve the long-term effectiveness of the improvement.
- The CMP toolbox identifies potential analysis tools for evaluating project alternatives. Simulation or other appropriate analysis tools from the toolbox are used to conduct an evaluation of the actions to assess their impacts in the corridor. The extent to which these actions can alleviate travel demand and congestion in the corridor compared to the baseline condition are documented as part of the study.
- Monitoring the effectiveness of implemented improvement projects provides data that supports use of congestion management strategies in future projects.

## ***Regional Intelligent Transportation Systems (ITS) Architecture***

The CMP relates to the Regional Intelligent Transportation System (ITS) architecture in the following ways:

- The Regional ITS architecture is an important resource for identifying sources of data in the region that can support monitoring and reporting of congestion using CMP performance measures.
- All ITS strategies implemented from the CMP toolbox should be consistent with the Regional ITS architecture. The Regional ITS architecture and the CMP toolbox should be reviewed for consistency and reconciled as necessary when either is updated.

## How Will Projects be Analyzed for Congestion Management Using the CMP?

This section presents the CMP analysis process for assessing the potential of CMP strategies in terms of established congestion management objectives and performance measures. A CMP analysis process is defined for each of the following types of transportation investments. All added capacity projects are subject to analysis:

- **Major Investments.** These are federal and state assisted, regionally significant added capacity projects located on the CMP network. Significant added capacity projects tend to have a substantial cost (greater than \$100 million) and significantly impact regional or corridor travel patterns. Project descriptions typically include a new roadway or bypass; major or minor road widening to add through lanes on an existing highway; major roadway reconstruction; adding capacity to a corridor by improving many related intersections; new interchange or adding capacity to an existing interchange; grade separation of existing intersections (that add capacity); etc.
- **Other Investment Types.** These are federal and state assisted added capacity projects with total project costs (federal request and local match) that do not exceed \$100 million and are located on the CMP Network.
- **Accelerated Projects.** These are projects that are introduced late in the RTP planning cycle due to accelerated growth or congestion relief, connection with an existing project, or new funding opportunities. As a result, the implementation of the projects does not correspond with the typical evaluation process and timeline required for projects already documented in the RTP.
- **Exempted Projects.** Projects are exempt from a CMP analysis if the proposed project solves a safety or bottleneck problem. The criteria for determining whether a project is categorized as a safety or bottleneck project is described at the end of this section.

The CMP analysis process involves conducting either a quantitative or qualitative assessment of the extent to which congestion mitigation strategies can alleviate travel demand and congestion in the corridor. The level of analysis varies depending on the type of transportation investment:

- **Major Investments.** The CMP analysis process for major investments consists of conducting a quantitative analysis of corridor alternatives to assess the extent to which congestion mitigation strategies can alleviate travel demand and congestion in the corridor. Congestion mitigation strategies must be considered as an alternative to capacity. Project sponsors are required to report on the specific strategies that will be implemented as part of the project, as well as quantitatively document the benefits of the project's ability to relieve congestion, improve trip reliability, and/or to define how it meets one or more of the CMP goals and objectives.
- **Other Investment Types.** All roadway added capacity projects with total project costs (federal request and local match) that do not exceed \$100 million will complete a qualitative assessment of the congestion reduction impacts of the project in terms of CMP objectives and


performance measures. The assessment criteria are similar to those established for the Transportation Improvement Program. A quantitative analysis is also conducted.

- **Accelerated Projects.** The CMP analysis process for accelerated projects may be quantitative or qualitative, depending on whether the project is categorized as a major investment or other investment type.
- **Exempted Projects.** Safety and bottleneck projects are exempt and do not require a CMP analysis to be conducted.

Project sponsors (governmental units including transit agencies and port authorities that are ultimately responsible for the project) are required to complete the CMP Project Analysis Form and submit it to H-GAC. The “Preliminary Questions” section of the form must be completed for all projects, regardless of investment type. For major investments, the “CMP Analysis for Major Investments” section of the form must be completed. For other investment types, the “CMP Analysis for Other Investment Types” section of the form must be completed. Instructions for completing the form are provided in Appendix B. H-GAC staff will review and approve the forms and, if necessary, contact the submitting agency regarding any questions.

An overview of the CMP analysis process for each investment type is summarized in Table 7.1 and Figure 7.2. The table identifies the criteria used to define each investment type (e.g., major investments, other investment types, accelerated projects, exempted projects), an overview of the CMP analysis process for the investment type, CMP Project Analysis Form requirements, and the timing of the CMP analysis within the overall project development process. The figure graphically depicts the criteria for determining investment type, type of CMP analysis, and CMP Project Analysis Form requirements. The CMP analysis process for each investment type is discussed in more detail following the table.

**Figure 7.2: CMP Analysis Process**

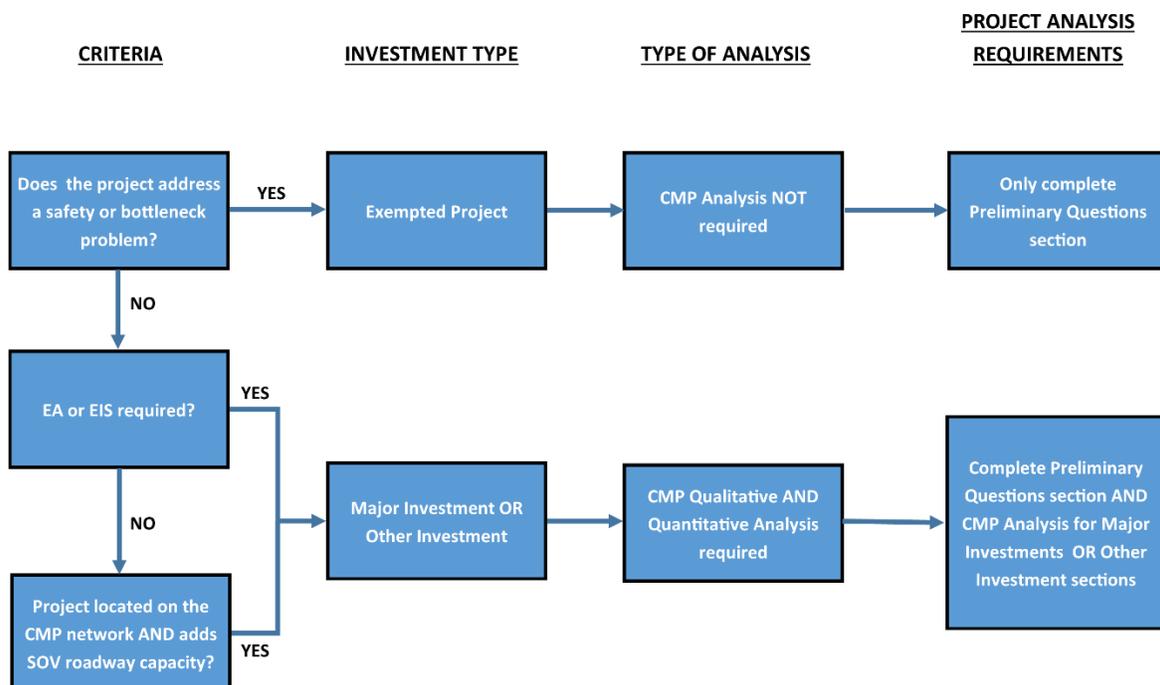

[OBJ]

**Table 7.: CMP Analysis Process**

	Investment Type			
	Major Investments	Other Investments	Accelerated Projects	Exempted Projects
<b>Criteria for Defining Investment Type</b>	<ul style="list-style-type: none"> <li>• Environmental assessment (EA) or environmental impact statement (EIS) required, OR</li> <li>• Project located on CMP Network AND costs over \$100 Million</li> </ul>	<ul style="list-style-type: none"> <li>• Project is not on CMP network, OR</li> <li>• Project does not exceed \$100 Million</li> </ul>	<ul style="list-style-type: none"> <li>• The same criteria as major investments or other investment types applies</li> </ul>	<ul style="list-style-type: none"> <li>• Project solves a safety or bottleneck problem, as defined by the criteria in Table 8.3</li> </ul>
<b>CMP Analysis Process</b>	<ul style="list-style-type: none"> <li>• CMP serves as warrant for justifying additional SOV capacity</li> <li>• Quantitative CMP analysis</li> <li>• Use CMP report to identify deficiencies on project corridor</li> <li>• Use CMP toolbox to identify congestion mitigation strategies and/or suggested analysis tools for inclusion in the corridor alternatives analysis and/or NEPA documentation.</li> <li>• Consider CMP strategies as an alternative to capacity, and/or bundle CMP strategies into the added capacity project.</li> <li>• Quantitatively document congestion reduction impacts in terms of CMP objectives and measures</li> <li>• Justify reasons for not implementing congestion mitigation strategies</li> </ul>	<ul style="list-style-type: none"> <li>• Other investment projects are subject to less rigorous congestion analysis</li> <li>• Quantitative and qualitative CMP analysis</li> <li>• Use CMP toolbox to identify congestion mitigation strategies and/or suggested analysis tools</li> <li>• Conduct qualitative analysis of congestion impacts based on planning factors</li> <li>• Qualitatively document congestion reduction impacts of the project in terms of CMP objectives and measures</li> </ul>	<ul style="list-style-type: none"> <li>• The same CMP analysis process as major investments or other investment types applies</li> <li>• H-GAC reviews the CMP analysis process results</li> <li>• H-GAC conducts a scoping meeting with the consultant/project sponsor to discuss alternatives analysis and incorporate CMP strategies into the preferred project alternative</li> <li>• A kickoff meeting is convened, and accelerated environmental assessment, design, and implementation process schedules are defined and implemented</li> </ul>	<ul style="list-style-type: none"> <li>• Project does not require a CMP analysis</li> </ul>

	Investment Type			
	Major Investments	Other Investments	Accelerated Projects	Exempted Projects
<b><i>CMP Project Analysis Form Requirements</i></b>	<ul style="list-style-type: none"> <li>Project sponsor completes both the "Preliminary Questions" and "CMP Analysis for Major Investments" sections of the CMP Project Analysis Form</li> </ul>	<ul style="list-style-type: none"> <li>Project sponsors complete both the "Preliminary Questions" and "CMP Analysis for Other Investments" sections of the CMP Project Analysis Form</li> </ul>	<ul style="list-style-type: none"> <li>Project sponsors complete the "Preliminary Questions" and either the "CMP Analysis for Major Investments" OR the "CMP Analysis for Other Investments" sections of the CMP Project Analysis Form (depending on investment type)</li> </ul>	<ul style="list-style-type: none"> <li>CMP Project Analysis Form not required.</li> </ul>
<b><i>Timing of CMP Analysis</i></b>	<ul style="list-style-type: none"> <li>Conduct CMP analysis as part of corridor alternatives analysis or NEPA document preparation</li> <li>Pre-requisite for TIP project application</li> </ul>	<ul style="list-style-type: none"> <li>Conduct CMP analysis as part of mobility study, traffic operations analysis, or local/regional study</li> <li>Pre-requisite for TIP project application</li> </ul>	<ul style="list-style-type: none"> <li>The same timing of CMP analysis as major investments or other investment types applies (depending on investment type)</li> </ul>	<ul style="list-style-type: none"> <li>CMP analysis not required</li> <li>Submit CMP Project Analysis Form to H-GAC as part of TIP project application</li> </ul>

## ***CMP Analysis for Major Investments***

Federal law prohibits regions designated as nonattainment for ozone or carbon monoxide standards from programming projects that result in a significant increase in carrying capacity for single-occupant vehicles (SOV) in its TIP unless the project is addressed in the region's CMP. Therefore, a CMP analysis is required for all federal and state assisted regionally significant added capacity projects located on the CMP network.

The CMP analysis process for major investments consists of conducting a quantitative analysis of corridor alternatives to assess the extent to which congestion mitigation strategies can alleviate travel demand and congestion in the corridor. First, the baseline condition is assessed to determine whether the problem/deficiency can be addressed without building more road capacity. Next, congestion mitigation strategies are evaluated as an alternative to the added capacity improvement. The CMP toolbox provides a starting point for identifying alternative congestion mitigation strategies while simulation or other appropriate analysis tools from the CMP toolbox are used to conduct an evaluation of the actions to assess their impacts in the corridor. If the CMP analysis indicates that congestion mitigation strategies are insufficient to meet the travel demand needs in the corridor and additional SOV capacity is warranted, then the analysis must identify supplemental congestion mitigation strategies to improve the long-term effectiveness of the capacity improvement.

The extent to which these actions can alleviate travel demand and congestion in the corridor compared to the baseline condition are documented as part of the CMP analysis. Project sponsors are required to report on the specific strategies that will be implemented as part of the project as well as quantitatively document the benefits of the project's ability to relieve congestion, improve trip reliability, and/or to define how it meets one or more of the CMP goals and objectives. If congestion mitigation strategies are not feasible or warranted as part of the project, an explanation must be provided as part of the CMP analysis.

Project sponsors are required to complete both the "Preliminary Questions" and "CMP Analysis for Major Investments" sections of the CMP Project Analysis Form and submit it to H-GAC. Ideally, a CMP analysis is performed by the project sponsor during the four- to 10-year short-range planning period in the RTP, prior to submittal of the TIP project application. The CMP analysis could be conducted as part of corridor alternatives analysis or NEPA document preparation, or it could be conducted as a separate analysis. Completing the CMP analysis is a prerequisite for consideration under H-GAC's TIP project application process.

Because major investment projects are often implemented by other local agencies, project sponsors should contact H-GAC staff at the start of a study or project that will likely add SOV road capacity to the CMP network. H-GAC staff will work with the consultant/project sponsor to discuss the alternatives analysis and incorporate congestion mitigation strategies into the preferred project alternative.

**CMP Analysis for Other Investments**

The CMP analysis process for other investment types is less rigorous compared to that for major investments and consists of both a quantitative and qualitative assessment of the congestion reduction impacts of the project in terms of CMP objectives and performance measures. Completing the CMP analysis for other investments will assist H-GAC in assessing the project’s expected impact on overall congestion goals and objectives for the region.

The CMP toolbox can be used to identify congestion mitigation strategies to solve a specific problem, or to identify an appropriate analysis tool for evaluating the quantitative benefits of a specific strategy type. The congestion reduction impacts of the project are assessed in terms of various qualitative criteria depending on the type of strategy, as shown in Table 7.2. The quantitative assessment criteria are similar to those established for the Transportation Improvement Program. The process also includes qualitatively documenting the benefits of the project’s ability to relieve congestion, improve trip reliability, and/or to define how it meets one or more of the CMP goals and objectives.

Project sponsors are required to complete both the “Preliminary Questions” and “CMP Analysis for Other Investment Types” sections of the CMP Project Analysis Form. The CMP analysis can be conducted as part of a mobility study, traffic operations analysis, or other local/regional study, and it is a prerequisite for consideration under H-GAC’s TIP project application process.

**Table 7.2: Qualitative Assessment for Other Investment Types**

Strategy Type	Qualitative Criteria
Transportation Demand Management	<ul style="list-style-type: none"> <li>• Does the project strongly support or enhance travel demand management programs that are already in place and that have regional significance? If yes, please explain.</li> <li>• Will the project reduce traffic congestion by reducing vehicle trips or VMT? If yes, please explain.</li> <li>• Will the project reduce vehicle emissions? If yes, please explain.</li> <li>• Does the project include multimodal system improvements? If yes, please explain prioritized mode(s) other than SOV?</li> </ul>
Land Use	<ul style="list-style-type: none"> <li>• Is the project identified within an H-GAC Special Districts study, an H-GAC Livable Centers study, or a comparable multi-jurisdictional or local plan study? If yes, please explain.</li> </ul>

Strategy Type	Qualitative Criteria
Public Transportation	<ul style="list-style-type: none"> <li>• Does the project include bicycle and pedestrian accommodations?</li> <li>• Does the project provide or demonstrate potential for a transit connection? If yes, please explain.</li> <li>• Is the project an intrinsic part or does it demonstrate the potential for transit-oriented development or first mile/last mile? If yes, please explain.</li> <li>• Does the project provide access to job opportunities, unmet, or enhanced needs? If yes, please explain.</li> <li>• Does the project use Intelligent Transportation Systems and other operation/service enhancing technologies? If yes, please explain.</li> <li>• Does the project address a need for expanded transit service capacity? If yes, please explain.</li> </ul>
Bicycle/ Pedestrian	<ul style="list-style-type: none"> <li>• Does the proposed facility meet or exceed TxDOT's policy for bicycle and pedestrian accommodation and American Association of State Highway and Transportation Officials (AASHTO) design guidelines for pedestrian and/or bicycle facilities? If yes, please explain.</li> <li>• Does the proposed facility provide safe and convenient routes across barriers, such as freeways, railroads, and waterways, or does it close a gap in the existing bicycle network that aligns with a regional bikeway shown on the Regional Bikeway Map? If yes, please explain.</li> <li>• Does the proposed facility provide connections to regional destinations? If yes, please explain.</li> </ul>
Intelligent Transportation Systems (ITS) and Operations	<ul style="list-style-type: none"> <li>• Is the project an integral part of an incident management system, or will it contribute to a reduction in incident clearance time? If yes, please explain.</li> <li>• Will the system utilize dynamic management of the facility to enhance travel time reliability (e.g., ramp metering, variable speed limits, variable pricing, etc.)? If yes, please explain.</li> <li>• Does the project coordinate traffic signal systems across jurisdictional boundaries and improve progression? If yes, please explain.</li> <li>• Does the project improve accuracy, timeliness, and availability of real-time information to the public? If yes, please explain.</li> <li>• Does the project improve automated traffic data collection and archiving ability? If yes, please explain.</li> <li>• Will the project give priority to emergency vehicles, transit, or high-occupancy vehicles? If yes, please explain.</li> <li>• Is the project consistent with the regional ITS Architecture? If yes, please explain.</li> </ul>
Roadway/ Mobility Improvements (Non-ITS)	<ul style="list-style-type: none"> <li>• Will the project improve operational efficiency/reliability on a designated freight corridor? If yes, please explain.</li> <li>• Will the project improve a roadway on which fixed route transit service is being provided or otherwise used by other transit services outside of a fixed route</li> </ul>

Strategy Type	Qualitative Criteria
	<p>service area? If yes, please explain.</p> <ul style="list-style-type: none"> <li>Does the project incorporate access management principles, such as raised medians, turn lanes, sharing/combining access points between businesses, or innovative intersections to reduce conflict points (e.g., roundabout, diverging diamond, single point urban interchange, etc.)? If yes, please explain.</li> <li>Does the project integrate Complete Streets design principles? If yes, please explain.</li> </ul>
Roadway Capacity Expansion (off the CMP Network)	<ul style="list-style-type: none"> <li>Does the project provide a needed connection or additional capacity as identified in an adopted thoroughfare plan? If yes, please explain.</li> <li>Does the project include segments of high congestion, and will the project help to mitigate this congestion? If yes, please explain.</li> <li>Does the project provide access to existing and/or future business and job activity centers, shopping, educational, cultural, and recreational opportunities? If yes, please explain.</li> <li>Will the project accommodate or create significant benefits to at least two additional modes of travel, or complete a link to intermodal or freight facilities of regional importance? If yes, please explain.</li> <li>Does the project integrate Complete Streets design principals</li> <li>Does the project impact a network-level change in congestion? If yes, please explain.</li> </ul>
Freight	<ul style="list-style-type: none"> <li>Does the project implement 18'6" vehicle clearances on interstates and highways?</li> <li>Does the project provide dedicated truck lanes?</li> <li>Does the project provide critical urban or rural freight corridors?</li> <li>Does the project improve connectivity to the region's ports?</li> </ul>

### ***CMP Analysis for Accelerated Projects***

One gap identified in the 2015 CMP update is related to the process of reviewing and planning for accelerated projects not considered and/or documented for programming in the RTP. In previous H-GAC planning cycles, some projects or strategies have been introduced late in the planning process due to one of the following factors:

- Accelerated growth or congestion relief
- Connection with an existing project
- Additional/new funding opportunities

While these projects typically moved smoothly through H-GAC's planning process, the implementation of the projects did not correspond with the typical evaluation process and timeline required for projects already documented in the RTP. In the 2009 CMP, H-GAC proposed an accelerated project process to ensure that proper analysis was conducted for an

accelerated project that was not in the RTP. A similar approach is recommended in this current CMP/RTP update cycle.

The CMP analysis process for accelerated projects is dependent on whether the project is categorized as a major investment, other investment type, or exempted project, using the same criteria defined previously in Table 7.1. The process includes the following steps:

1. If not an exempted project, project sponsors complete the “Preliminary Questions” and either the “CMP Analysis for Major Investments” or the “CMP Analysis for Other Investments” sections of the CMP Project Analysis Form, depending on the investment type.
2. H-GAC reviews the CMP analysis process results.
3. H-GAC conducts a scoping meeting with the consultant/project sponsor to discuss alternatives analysis and incorporate congestion mitigation strategies into the preferred project alternative.
4. A kickoff meeting is convened, and accelerated environmental assessment, design, and implementation process schedules are defined and implemented.

The CMP analysis should be completed before start of the environmental assessment process and potential incorporation in the TIP. The congestion mitigation strategies identified to be most beneficial are required to be incorporated into each of these projects. The process also includes documenting the benefits of the project’s ability to relieve congestion, improve trip reliability, and/or to define how it meets one or more of the CMP goals and objectives.

H-GAC should meet with TxDOT and other relevant agencies to periodically review projects, determine where they are in the process, identify which elements/documents need to be completed, and identify the agency/jurisdiction responsible for performing the work.

***CMP Analysis Exemptions***

Projects are exempt from a CMP analysis if the predominant improvement type solves a safety or bottleneck problem. Table 7.3 identifies site characteristics and typical strategies used to distinguish safety and bottleneck improvement projects. Project sponsors must work with H-GAC staff to confirm that a safety or bottleneck issue exists and that the project should be classified accordingly.

No CMP analysis is required to be conducted for safety and bottleneck projects. Project sponsors complete only the “Preliminary Questions” section of the CMP Project Analysis Form and submit it to H-GAC as part of the TIP project application.

**Table 7.3: Project Types Exempt from CMP Analysis**

Project Type	Site Characteristics	Typical Strategies
--------------	----------------------	--------------------

<b>Safety Projects</b>	<p>Any of the following conditions may exist or help to identify a safety condition:</p> <ul style="list-style-type: none"> <li>• The predominant improvement type addresses an immediate safety need along a corridor or intersection as documented in a regional/local traffic or safety study</li> <li>• The project location has been identified as a regional crash hotspot or location of high crash incidence by procedures developed by H-GAC</li> </ul>	<p>Safety improvements do not include adding capacity and can be accommodated within existing right-of-way. Safety exempt project types include<sup>1</sup>:</p> <ul style="list-style-type: none"> <li>• Railroad/highway crossing</li> <li>• Bike and Pedestrian safety improvements</li> <li>• Projects that correct, improve, or eliminate a hazardous location or feature</li> <li>• Safer non-federal aid system roads</li> <li>• Shoulder improvements</li> <li>• Increasing sight distance</li> <li>• Highway Safety Improvement Program (HSIP) implementation projects</li> <li>• Traffic control devices and operating assistance other than signalization projects</li> <li>• Railroad/highway crossing warning devices</li> <li>• Guardrails, median barriers, crash cushions</li> <li>• Pavement resurfacing and/or rehabilitation</li> <li>• Pavement marking</li> <li>• Emergency relief (23 USC 125)</li> <li>• Fencing</li> <li>• Skid treatments</li> <li>• Safety roadside rest areas</li> <li>• Adding medians</li> <li>• Truck climbing lanes outside the urbanized area</li> <li>• Lighting improvements</li> <li>• Widening narrow pavements or reconstructing bridges (no additional travel lanes)</li> <li>• Emergency truck pullovers</li> </ul>
<b>Bottleneck Projects</b>	<p>Typical bottleneck locations include lane drops, weaving areas, freeway on-ramps, freeway exit ramps, freeway-to-freeway interchanges, changes in highway alignment, tunnels/underpasses, narrow lanes/lack of shoulders, or at traffic control devices.</p> <p>The following conditions exist or help to identify a recurring bottleneck condition<sup>2</sup>:</p> <ul style="list-style-type: none"> <li>• A traffic queue exists upstream of the bottleneck, wherein speeds are lower while free flow conditions exist elsewhere on the facility.</li> <li>• A beginning point for a queue. There should be a definable point that separates upstream and downstream conditions. The geometry of that point is often coincidentally the root cause of the operational deficiency.</li> </ul>	<p>Bottleneck improvements are low cost, less than 1 mile in length, and typically include the following strategy types:</p> <ul style="list-style-type: none"> <li>• Low-cost capacity improvements (e.g., auxiliary lanes, shoulder conversions)</li> <li>• Minor intersection/interchange modifications (restriping to change lane configuration, merge/diverge areas, or weaving areas, ramp modifications)</li> <li>• Traffic control device improvements (e.g., ramp metering, signal timing, etc.)</li> </ul>

Project Type	Site Characteristics	Typical Strategies
	<ul style="list-style-type: none"> <li>• Free flow traffic conditions downstream of the bottleneck that have returned to nominal or design conditions.</li> <li>• As it pertains to an operational deficiency, a predictable recurring cause that is theoretically “correctable” by design.</li> <li>• Traffic volumes that exceed the capability of the confluence to process traffic. Note: this applies to recurring events more so than nonrecurring.</li> </ul>	

Notes: <sup>1</sup> Safety exempt project types are the same as those defined in federal regulation (40 CFR 92.126) to be exempt from conformity requirements

<sup>2</sup> Source: FHWA Guidance on Localized Bottlenecks, <http://ops.fhwa.dot.gov/bn/lbr.htm#g9>

### Quantitative Analysis

The quantitative analysis for project evaluation occurs after a project is selected but before funds are assigned. In the quantitative analysis, H-GAC staff evaluate changes in the peak period volume to capacity ratio.

Peak period volume to capacity (V/C) ratio measures the level of congestion on the roadway by dividing the volume of traffic during the peak period by the capacity of the roadway. It is based on directional 24-hour lane volumes of existing and near future roadways in the CMP network.

“Levels of Mobility” for measuring severity of congestion were included in the 2013 CMP, as adopted by the Transportation Policy Council for the Houston-Galveston TMA. Each level was tied to the Volume to Capacity ratio. The analysis adopted is listed below in Figure 7.3.

**Figure 7.3: Levels of Mobility**

Levels of Mobility	Volume to Capacity Ratio
Tolerable	< 0.85
Moderate	> = 0.85
Serious	> 1.00 and <1.25
Severe	>1.25

## SECTION 8 – CMP STRATEGY EFFECTIVENESS

The purpose of this step is to ensure that the implemented strategies are having the desired impact for managing congestion in the Houston-Galveston MPO region. We use the term congestion management rather than congestion reduction to acknowledge that success in congestion management in our region, due to our rapid growth, may not be always result in a reduction and in fact may appear flat or even as a modest increase as reflected in certain performance measures.

### The Unknown

Congestion has changed considerably in the Houston-Galveston MPO region since the advent of the COVID-19 pandemic in early 2020. Telework has expanded dramatically resulting in significantly reduced roadway congestion, especially during a.m. and p.m. peak periods. 2020 congestion indicators will certainly reflect the profound impact of COVID-19 on roadway congestion. While the impacts of the pandemic will likely lessen in 2021 and 2022, a long-term increase in teleworking from pre-pandemic levels is likely.

Retail services are also undergoing a fundamental shift in the delivery of services and goods. In-person purchases at stores and restaurants are often replaced with deliveries. Whether this is merely a shift or a reduction in vehicle miles traveled is uncertain. However, it is likely a trend that will require further monitoring.

The Houston-Galveston MPO region is prone to flooding and tropical events, which can alter congestion for several weeks to a few months. Large-scale construction projects can also have regional and sub-regional impacts during and after completion. Planned and unplanned events must be considered along with mitigation efforts over time. Continual monitoring of the CMP strategies considering all the above factors is essential to practical analysis.

### Next Steps

H-GAC will utilize the targets and performance measures identified in this CMP to gauge progress and success with respect to congestion management. Strategy success will be linked to the achievement of regionwide annual and biennial targets and improvement in segment level congestion in the most problematic areas of the region (discussed in Section 5) on an annual basis. Success will also be monitored using the CMP analyses performed for non-exempt, added-capacity projects, evaluating the implementation of the congestion management strategies identified and their effectiveness. The most successful strategies across projects that help the region meet local and regionwide objectives and metrics will be identified.

There is work under way to update the Regional Transportation Plan, Regional Bikeways Map, and the High-Capacity Transit Plan, among others. It is recommended that a taskforce convene after this update to review the results of these efforts and incorporate them into an update of the congestion management process for 2022. As part of this update, it is recommended that vehicle miles traveled (VMT) be considered for inclusion as a performance measure. Newly defined measures for safety and air quality should also be considered.


New tools have also been developed for measuring and managing congestion. This update should consider incorporating the new tools as feasible.

# APPENDIX A – ADDITIONAL NETWORKS FOR MONITORING AND MITIGATION

## Congestion Strategy Networks – Tow and Go, Bikeways, Sidewalks, High-Capacity Transit, Intelligent Transportation Systems

The purpose of Appendix A is to provide supplemental networks that may be used to monitor strategies mentioned in this CMP and how they may impact the CMP network. These additional networks can be helpful for analyzing appropriate strategies for regional projects, effectiveness of these projects, and opportunities to expand the availability of strategies.

Figure A-1: Regional Tow and Go Network

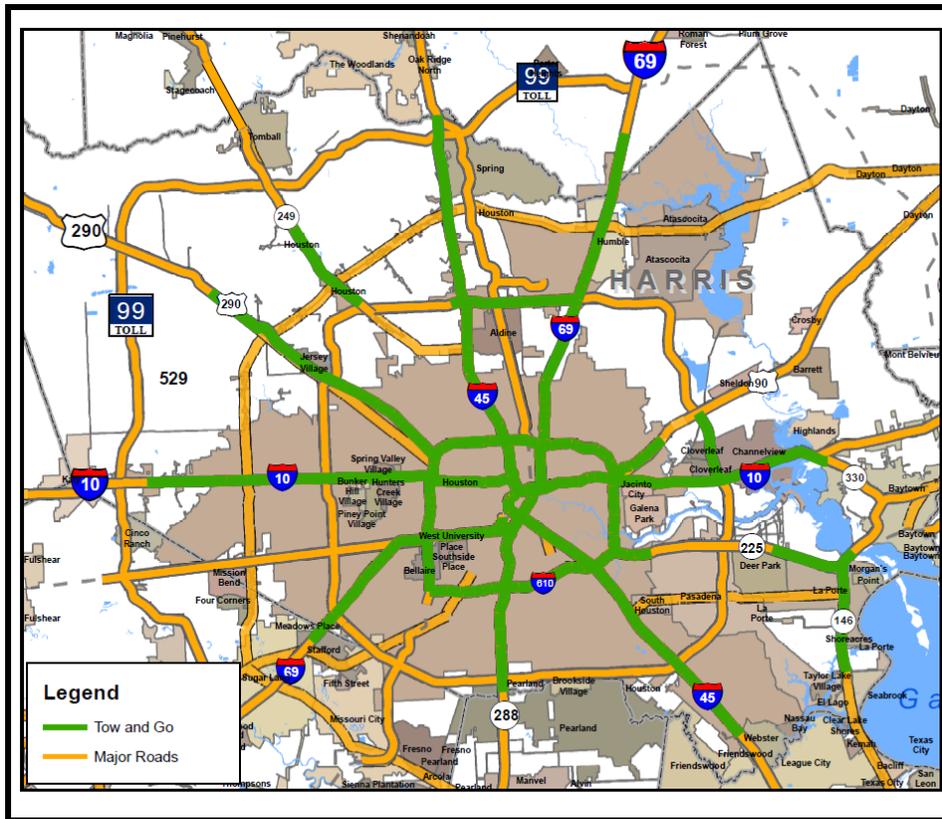

**Figure A-1** shows the extent of the current and planned **Tow and Go network**. Designed to quickly remove disabled vehicles as the result of accidents or mechanical breakdowns, it has proven to be an effective means of mitigating congestion.

Figure A-2: Regional ITS Network

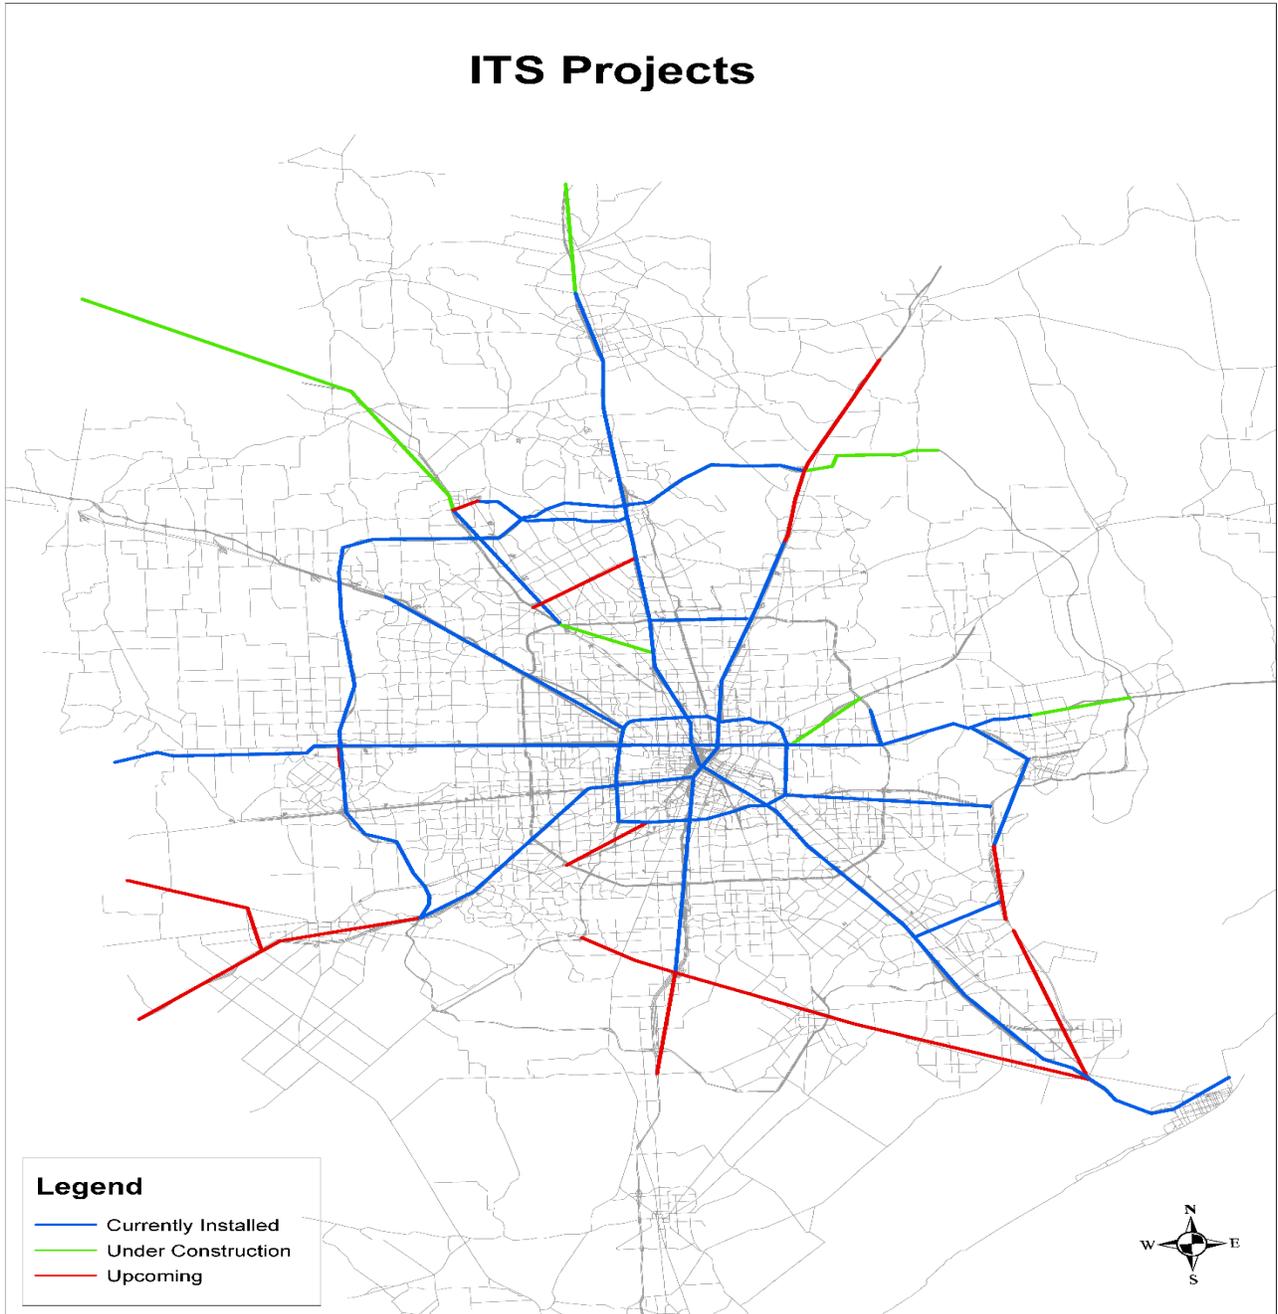



Figure A-2 shows the extent of the current and planned **Intelligent Transportation System (ITS)**. Designed to provide timely information of traffic conditions and relieving bottlenecks, ITS is highly useful in providing information and choice.








**Figure A-6 Regional Bikeways Map**

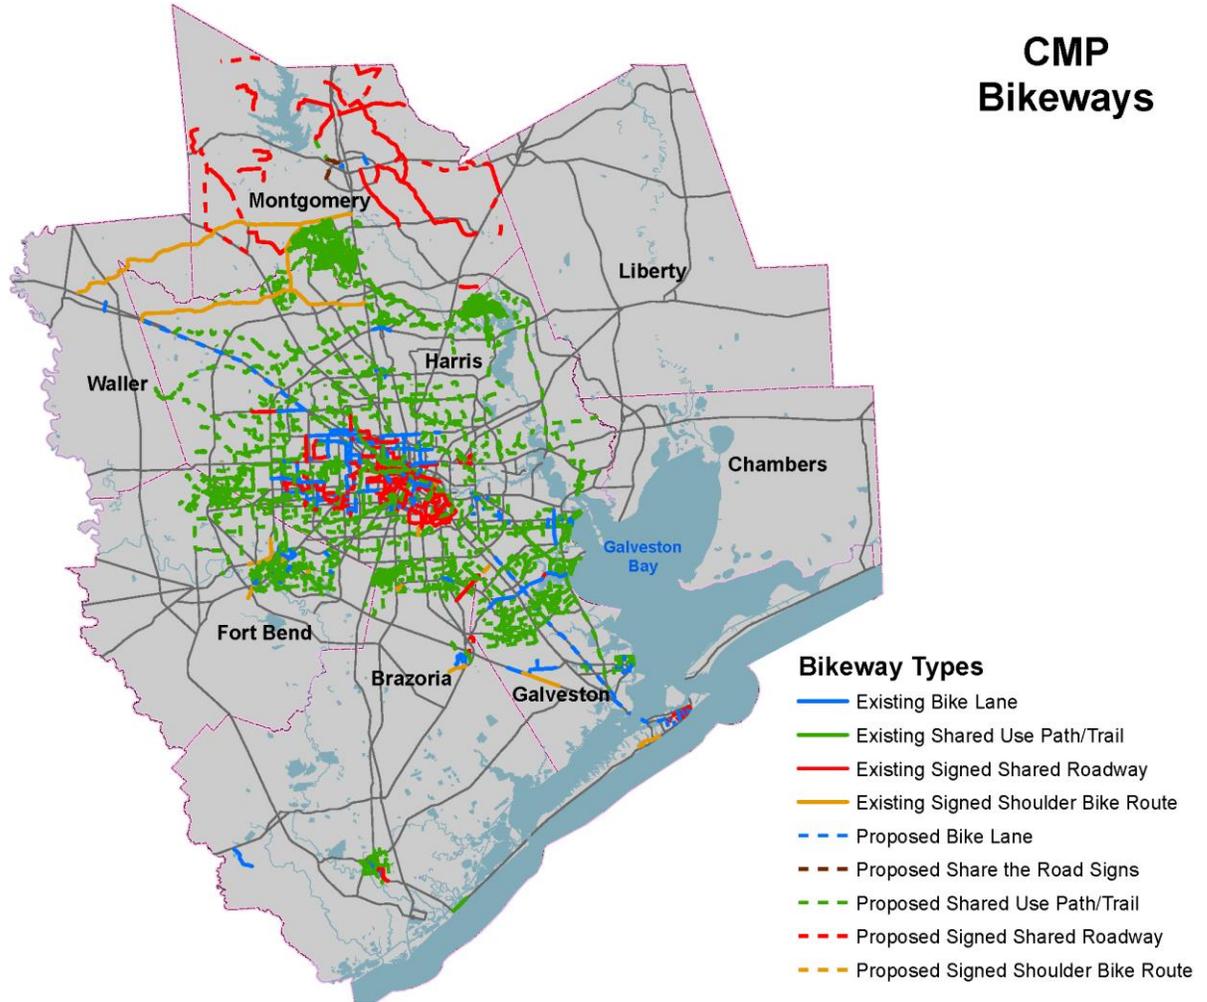

**Figure A-6** shows the extent of the current bike network. Cycling has been an increasingly attractive mode for a variety of shorter trips that can be used instead of the automobile. Additional interactive information is available at the Activity Coordination Explorer located at <https://datalab.h-gac.com/ace/>.

**Figure A-7: Regional Pedestrian Sidewalk Map**

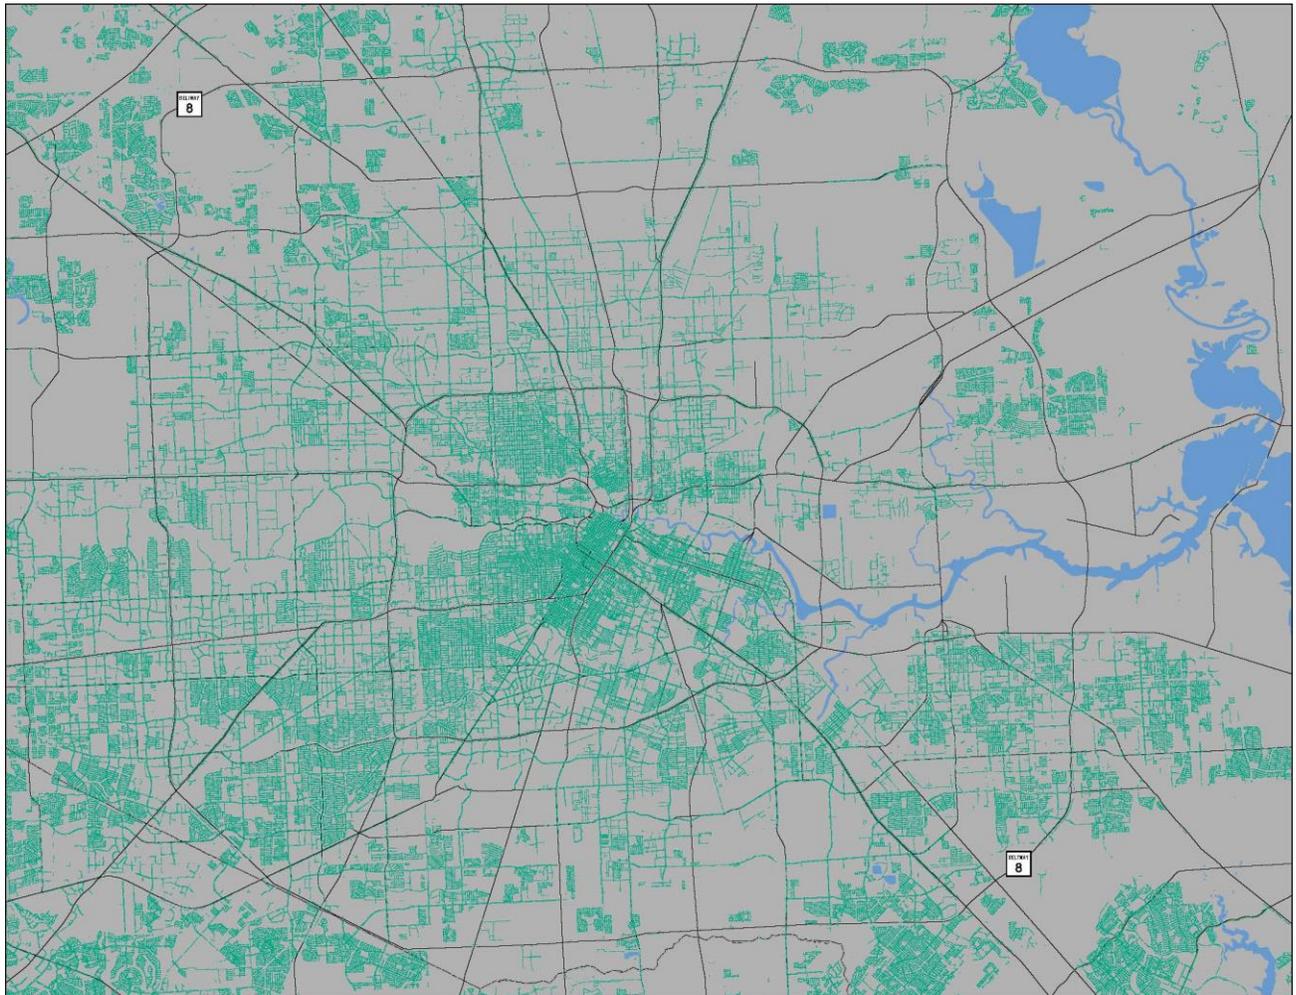

**Figure A-7** shows the regional pedestrian sidewalk network. Efforts are underway by the City of Houston, METRO, and others to increase and upgrade their sidewalk infrastructure. The better the sidewalks are the more likely people are to use them for short trips or to walk to the bus stop instead of using their automobile. Additional interactive information is available at the Activity Coordination Explorer located at <https://datalab.h-gac.com/ace/>.

# APPENDIX B – CONGESTION MANAGEMENT PROCESS PROJECT ANALYSIS FORM

## CMP PROJECT ANALYSIS FORM

### Applicant Information

**Date:** [Click here to enter a date.](#)

**Agency Name:** [Click here to enter text.](#)

**Agency Address:** [Click here to enter text.](#)

**Person Submitting Form:** [Click here to enter text.](#)

**Email:** [Click here to enter text.](#)

**Telephone Number:** [Click here to enter text.](#)

### Preliminary Questions

This section is REQUIRED to be completed for all projects required to complete this form.

#### 1. Describe the proposed improvement (facility, limits, project description).

[Click here to enter text.](#)

#### 2. Does the project address a safety or bottleneck problem?

Yes | No

**If yes, please explain.** [Click here to enter text.](#)

*If yes, the project is exempt from further CMP analysis. Stop and submit this form to H-GAC.*

*If no, continue to the next question.*

#### 3. Is the project located on the CMP network?

Yes | No

*If yes, continue to the next question.*

*If no, complete CMP Analysis for Other Investments section (questions 10-12).*

#### 4. Is an Environmental Assessment (EA) or Environmental Impact Statement (EIS) required for the project?

Yes | No

*If yes, complete the CMP Analysis for Major Investments section (questions 6-9).*

*If no, continue to the next question.*

#### 5. Is the project cost greater than \$100 Million?

Yes | No

**If yes, please explain.** [Click here to enter text.](#)

*If yes, complete CMP Analysis for Major Investments section (questions 6-9).*

*If no, complete CMP Analysis for Other Investments section (questions 13-15).*

## **CMP Analysis for Major Investments**

This section is to be completed for projects requiring an EA/EIS, or for significant SOV capacity-adding projects located on the CMP network.

**6. Are there other congestion mitigation projects (e.g., transportation demand management, land use, public transportation, ITS and operations, pricing, bicycle and pedestrian, and bottleneck relief) within the project corridor that are programmed into the current TIP?**

Yes No

**If yes, identify the project name(s), state the project identification number (CSJ number), and MPO project identification number.**

Project

Name

[Click here to enter text.](#) CSJ # [Click here to enter text.](#)

MPO

Project #

[Click here to enter text.](#)

Project

Name

[Click here to enter text.](#) CSJ # [Click here to enter text.](#)

MPO

Project #

[Click here to enter text.](#)

Project

Name

[Click here to enter text.](#) CSJ # [Click here to enter text.](#)

MPO

Project #

[Click here to enter text.](#)

**7. Specify congestion mitigation strategies that will be implemented as part of the project.**

[Click here to enter text.](#)

**8. What are the specific congestion reduction impacts of the implemented strategies?**

[Click here to enter text.](#)

**9. If not implementing a congestion mitigation strategy, please explain reason.**

[Click here to enter text.](#)

Stop and submit the completed form to H-GAC.

## **CMP Analysis for Other Investments**

This section is to be completed for other investment types or for capacity-adding projects that are not located on the CMP network.

**10. What type(s) of congestion management strategy/strategies is/are encompassed by the project/program according to the following strategy types:**

Transportation Demand Management Improvements  
Land Use Improvements  
Public Transportation Improvements  
Bicycle/Pedestrian Improvements  
Intelligent Transportation Systems (ITS) and Operations Strategies  
Roadway/Mobility (Non-ITS) Improvements  
Roadway Capacity Expansion (Off the CMP network)

**11. Complete the following qualitative criteria for the strategy type(s) encompassed by the project/program. More than one category could apply:**

**Transportation Demand Management**

- Does the project strongly support or enhance travel demand management programs that are already in place and that have regional significance?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Will the project reduce traffic congestion by reducing vehicle trips or VMT?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Will the project reduce vehicle emissions?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

Does the project include marketing, education, and incentive programs that encourage shift to alternative modes?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Does the project include multimodal system improvements?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

**Land Use**

- Is the project identified within an H-GAC Special Districts study, an H-GAC Livable Centers study, or a comparable multi-jurisdictional or local plan study? Does the project include multimodal system improvements?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

**Public Transportation**

- Does the project provide or demonstrate the potential for a transit connection?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Does the project provide connection to other transit services

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

Does the project include pedestrian and bicycle accommodations?

Yes | No

*If yes, please explain. Click here to enter text.*

Is the project an intrinsic part or does it demonstrate the potential for transit-oriented development?

Yes | No

*If yes, please explain. Click here to enter text.*

Does the project provide access to job opportunities, unmet, or enhanced needs?

Yes | No

*If yes, please explain. Click here to enter text.*

Does the project use Intelligent Transportation Systems and other operation/service-enhancing technologies?

Yes | No

*If yes, please explain. Click here to enter text.*

Does the project address a need for expanded transit service capacity?

Yes | No

*If yes, please explain. Click here to enter text.*

### **Bicycle/Pedestrian**

Does the proposed facility meet or exceed TxDOT's policy for bicycle and pedestrian accommodation and AASHTO design guidelines for pedestrian and/or bicycle facilities?

Yes | No

*If yes, please explain. Click here to enter text.*

Does the proposed facility provide safe and convenient routes across barriers, such as freeways, railroads, and waterways, or does it close a gap in the existing bicycle network that aligns with a regional bikeway shown on the Regional Bikeway Map?

Yes | No

*If yes, please explain. Click here to enter text.*

Does the proposed facility provide connections to regional destinations?

Yes | No

*If yes, please explain. Click here to enter text.*

### **Intelligent Transportation Systems (ITS) and Operations**

Is the project an integral part of an incident management system, or will it contribute to a reduction in incident clearance time?

Yes | No

*If yes, please explain. Click here to enter text.*

Will the system utilize dynamic management of the facility to enhance travel time reliability (e.g., ramp metering, variable speed limits, variable pricing, etc.?)

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Does the project coordinate traffic signal systems across jurisdictional boundaries and improve progression?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

Does the project improve accuracy, timeliness, and availability of real-time information to the public?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

Does the project improve automated traffic data collection and archiving ability?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Will the project give priority to emergency vehicles, transit, or high-occupancy vehicles?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

Is the project consistent with the regional ITS architecture?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

### **Roadway/Mobility Improvements (Non-ITS)**

- Will the project improve operation efficiency/reliability on a designated freight corridor?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Will the project improve a roadway on which fixed route transit service is being provided or otherwise used by other transit services outside a fixed route service area?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Does the project incorporate access management principles such as raised medians, turn lanes, sharing/combining access points between businesses, or innovate intersections to reduce conflict points (e.g., roundabout, diverging diamond, single urban interchange, etc.)?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

- Does the project include pedestrian/bicycle accommodations that meet or exceed TxDOT's policy for bicycle and pedestrian accommodation and AASHTO design guidelines?

Yes | No

*If yes, please explain. Click here to enter text.*

- Does the project integrate Complete Streets design principles?

Yes | No

*If yes, please explain. Click here to enter text.*

### **Roadway Capacity Expansion (capacity-adding projects that are not located on the CMP network)**

- Does the project provide a needed connection or additional capacity as identified in an adopted thoroughfare plan?

Yes | No

*If yes, please explain. Click here to enter text.*

•

- Does the project include segments of high congestion, and will the project help to mitigate this congestion?

Yes | No

*If yes, please explain. Click here to enter text.*

- Does the project provide access to existing and/or future business and job activity centers, shopping, educational, cultural, and recreational opportunities?

Yes | No

*If yes, please explain. Click here to enter text.*

- Will the project accommodate or create significant benefits to at least two additional modes of travel or complete a link to intermodal or freight facilities of regional importance?

Yes | No

*If yes, please explain. Click here to enter text.*

- Does the project impact a network-level change in congestion?

Yes | No

*If yes, please explain. Click here to enter text.*

### **Freight**

- Does the project implement 18'6" vehicle clearances on interstates and highways?

Yes | No

- Does the project provide dedicated truck lanes?

Yes | No

*If yes, please explain. Click here to enter text.*

- Does the project provide critical urban or rural freight corridors?

Yes | No

*If yes, please explain. Click here to enter text.*

Does the project improve connectivity to the region's ports?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

Does the project include Intelligent Transportation Systems that will create or improve freight travel information or freight data collection?

Yes | No

*If yes, please explain.* [Click here to enter text.](#)

**12. What are the specific congestion reduction impacts of the implemented strategies? category could apply:**

[Click here to enter text.](#)

Stop and submit the completed form to H-GAC.

## Appendix C – The 36 Most Congested Corridors in the Houston-Galveston MPO Region

Every year the Texas Transportation Institute publishes the 100 most congested roadway segments in Texas. Consistently more than one third of the segments are in Houston. In 2019, 36 were in the Houston - Galveston MPO region with all congested roadway segments located in Harris County.

2019 Rank -- All Delay	County	Road Name	From	To	Miles Length	Texas Congestion Index
1	Harris	W Loop Fwy / IH 610	Katy Fwy / IH 10 / US 90	Southwest Fwy / US 59 / IH 69	3.62	2.32
3	Harris	Southwest Fwy / IH 69 / US 59	W Loop Fwy / IH 610	South Fwy / SH 288	5.44	1.99
4	Harris	Eastex Fwy / IH 69 / US 59	SH 288	IH 10	3.03	2.40
6	Harris	Gulf Fwy / IH 45	IH 10 / US 90	S Loop E Fwy / IH 610	7.89	1.75
9	Harris	Katy Fwy / IH 10 / US 90	N Eldridge Pkwy	Sam Houston Tollway W / SL 8	3.28	1.75
11	Harris	N Loop W Fwy / IH 610	North Fwy / IH 45	US 90	6.22	1.85
12	Harris	North Fwy / IH 45	Sam Houston Tollway N	N Loop Fwy / IH 610	9.26	1.51
13	Harris	IH 10 / US 90	North Fwy / IH 45	Eastex Fwy / US 59	1.57	1.83
14	Harris	Katy Fwy / IH 10 / US 90	Sam Houston Tollway W / SL 8	W Loop N Fwy / IH 610	6.62	1.49
17	Harris	North Fwy / IH 45	N Loop Fwy / IH 610	IH 10 / US 90	3.11	1.58
18	Harris	Katy Fwy / IH 10 / US 90	W Loop N Fwy / IH 610	North Fwy / IH 45	5.65	1.58
19	Harris	South Fwy / SH 288	Gulf Fwy / IH 45	S Loop W Fwy / IH 610	4.80	1.66
27	Harris	Cypress Creek Pkwy / FM 1960	Tomball Pkwy / SH 249	North Fwy / IH 45	8.26	1.61
30	Harris	Gulf Fwy / IH 45	S Loop E Fwy / IH 610	Sam Houston Tollway SE / SL 8	8.03	1.41
32	Harris	Southwest Fwy / IH 69 / US 59	W Sam Houston Pkwy S / SL 8	IH 610	7.83	1.42
33	Harris	Northwest Fwy / US 290	SH 6	Sam Houston Tollway NW / SL 8	4.73	1.53
34	Harris	S Loop E Fwy / IH 610	South Fwy / SH 288	Gulf Fwy / IH 45	5.82	1.51
35	Harris	Westheimer Rd / FM 1093	SH 6	Sam Houston Tollway W / SL 8	5.19	1.45
38	Harris	Katy Fwy / IH 10 / US 90	Grand Pkwy / SH 99	N Eldridge Pkwy	9.57	1.48

39	Harris	FM 1960	Tomball Pkwy / SH 249	Northwest Fwy / US 290	5.11	1.58
40	Harris	W Loop S Fwy / IH 610	Southwest Fwy / US 59 / IH 69	South Fwy / SH 288	8.00	1.38
43	Harris	South Fwy / SH 288	S Loop W Fwy / IH 610	Sam Houston Tollway S / SL 8	5.79	1.58
48	Harris	Northwest Fwy / US 290	Sam Houston Tollway NW / SL 8	N Loop W Fwy / IH 610	8.27	1.29
49	Harris	UA 90	South Fwy / SH 288	S Loop W Fwy / IH 610	3.73	1.44
51	Harris	N Loop E Fwy / IH 610	North Fwy / IH 45	East Fwy / IH 10	8.15	1.39
55	Harris	Westheimer Rd / FM 1093	Sam Houston Tollway W / SL 8	West Loop S / IH 610	6.01	1.25
58	Harris	East Fwy / IH 10 / US 90	Eastex Fwy / US 59	E Loop Fwy / IH 610	4.79	1.38
59	Harris	Voss Rd / Hillcroft Ave	Katy Fwy / IH 10 / US 90	Southwest Fwy / IH 69 / US 59	4.79	1.47
63	Harris	E Loop Fwy / IH 610	East Fwy / IH 10	Gulf Fwy / IH 45	6.13	1.39
66	Harris	Sam Houston Tollway W / SL 8	Southwest Fwy / IH 69	IH 10	8.61	1.44
67	Harris	Tomball Pkwy / SH 249	Sam Houston Tollway NW / SL 8	North Fwy / IH 45	7.21	1.52
73	Harris	SH 6	Katy Fwy / IH 10 / US 90	Westpark Tollway	5.12	1.45
76	Harris	Bellaire Blvd	Sam Houston Tollway W / SL 8	West Loop S / IH 610	5.91	1.33
87	Harris	N Fry Rd	FM 529	Katy Fwy / IH 10 / US 90	6.61	1.35
89	Harris	Beechnut St	Winkleman Dr	Sam Houston Tollway SW / SL 8	5.75	1.37
99	Harris	SH 6	Northwest Fwy / US 290	Katy Fwy / IH 10 / US 90	9.77	1.40